


DENON

Hi-Fi Integrated Stereo Amplifier

SERVICE MANUAL

MODEL PMA-2000R

INTEGRATED STEREO AMPLIFIER

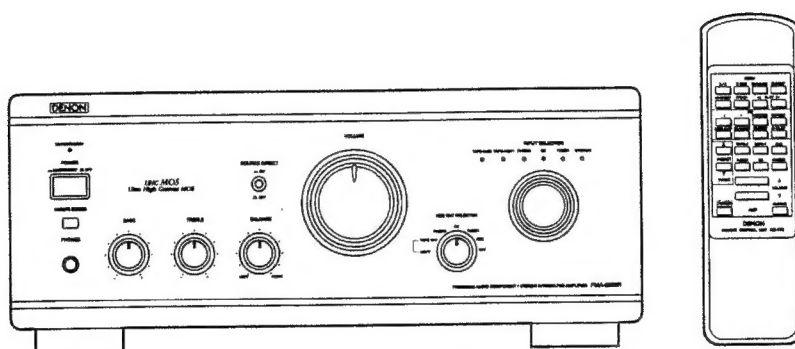

— TABLE OF CONTENTS —

OPERATING INSTRUCTIONS	2~8
SPECIFICATIONS	9
REMOVAL OF EACH SECTION	10,11
METHOD OF ADJUSTMENTS	12
BLOCK AND LEVEL DIAGRAM	13
SEMICONDUCTORS	14,15
PRINTED WIRING BOARD	16,17
NOTE FOR PARTS LIST	18
PARTS LIST OF P.W.BOARD	19~21
EXPLODED VIEW	22
PARTS LIST OF EXPLODED VIEW	23
WIRING DIAGRAM	24
SCHEMATIC DIAGRAM	25,26

• Some illustration using in this service manual is slightly different from the actual set.

NIPPON COLUMBIA CO., LTD.

OPERATING INSTRUCTIONS

— TABLE OF CONTENTS —

1	DESIGNATIONS AND FUNCTIONS OF PANEL CONTROLS	8, 9
2	CONNECTIONS	9, 10
3	OPERATION	11
4	REMOTE CONTROL OPERATION	12, 13
5	TRUBLESHOOTING	14
6	SPECIFICATIONS	15

Please check to make sure the following items are included with the unit in the carton:

- (1) Operating instructions
- (2) Remote Control Unit (RC-176)
- (3) Batteries R6P (AA)
- (4) AC Power Cord

— INHALT —

1	BEZEICHNUNGEN UND FUNKTIONEN DER BEDIENUNGSELEMENTE	16, 17
2	ANSCHLÜSSE	17, 18
3	BETRIEB	19
4	FERNBEDIENUNG	20, 21
5	FEHLERSUCHE	22
6	TECHNISCHE DATEN	23

Bitte überprüfen Sie, ob die folgenden Teile vollständig in der Verpackung enthalten sind:

- (1) Bedienungsanleitung
- (2) Fernbedienung (RC-176)
- (3) Batterien vom Typ R6P (AA)
- (4) AC-Netzstecksel

— TABLE DES MATIERES —

1	NOMENCLATURE ET FONCTIONS DES COMMANDES DE PANNEAU	24, 25
2	CONNEXIONS	25, 26
3	FONCTIONNEMENT	27
4	UTILISATION DE LA TELECOMMANDE	28, 29
5	DEPISTAGE DES PROBLEMES	30
6	SPECIFICATIONS	31

Veuillez contrôler que les articles suivants sont bien joints à l'appareil principal dans le carton:

- (1) Mode d'emploi
- (2) Unité de télécommande (RC-176)
- (3) Piles R6P (AA)
- (4) Cordon électrique AC

— INDICE —

1	DESIGNAZIONE E FUNZIONAMENTO DEI CONTROLLI DEL PANNELLO	32, 33
2	CONNESSIONI	33, 34
3	FUNZIONAMENTO	35
4	FUNZIONAMENTO DEL TELECOMANDO	36, 37
5	LOCALIZZAZIONE DEI GUASTI	38
6	SPECIFICAZIONI	39

Controllare che le parti seguenti si trovino imballate con l'apparecchio nella scatola di spedizione:

- (1) Libretto delle istruzioni
- (2) Telecomando (RC-176)
- (3) Batterie R6P (AA)
- (4) Fila di alimentazione CA

— INDICE —

1	FUNCIÓNES Y DENOMINACIONES DE LOS CONTROLES DE PANEL	40, 41
2	CONEXIONES	41, 42
3	OPERACIÓN	43
4	OPERACIÓN A CONTROL REMOTO	44, 45
5	ANTES DE SOLICITAR REPARACIONES	46
6	ESPECIFICACIONES	47

Por favor verifique asegurándose de que los siguientes artículos son empacados en la caja pero separados de la unidad principal:

- (1) Manual de instrucciones
- (2) Unidad de control remoto (RC-176)
- (3) Piles R6P (AA)
- (4) Cable de corriente CA

— INHOUD —

1	BENAMINGEN EN FUNKTIES VAN DE BEDIENINGSORGANEN OF HET VOORPANEEL	48, 49
2	AANSLUITINGEN	49, 50
3	BEDIENING	51
4	WERKING AFSTANDSBEDIENING	52, 53
5	IN GEVAL VAN PROBLEEM	54
6	TECHNISCHE GEGEVENS	55

Controleer of de volgende accessoires bij het hoofdtoestel in de doos zijn verpakt:

- (1) Gebruiksaanwijzing
- (2) Afstandsbediening (RC-176)
- (3) Batterijen R6P (AA)
- (4) Netstekker

— INNEHÅLL —

1	BETECKNINGAR OCH FUNKTIONER FÖR KONTROLLERNA PÅ FRONTPANELEN	56, 57
2	ANSLUTNINGAR	57, 58
3	MANÖVRERING	59
4	FJÄRRKONTROLLEN	60, 61
5	FELSÖKNING	62
6	SPECIFIKATIONER	63

Kontrollera att följande, förutom huvudapparat, finns med i kartongen:

- (1) Bruksanvisning
- (2) Fjärrkontroll (RC-176)
- (3) Batterier R6P (AA)
- (4) Nätsladd

— INDICE —

1	DESIGNAÇÕES E FUNÇÕES DOS CONTROLES DO PAINEL	64, 65
2	CONEXÕES	65, 66
3	OPERAÇÃO	67
4	OPERAÇÃO DE CONTROLE REMOTO	68, 69
5	RESOLUÇÃO DE PROBLEMAS	70
6	ESPECIFICAÇÕES	71

Certifique-se de que as seguintes peças estão incluídas na embalagem fora da unidade principal:

- (1) Instruções de operação
- (2) Unidade de controle remoto (RC-176)
- (3) Baterias R6P (AA)
- (4) Cabo de CA



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.

The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

● FOR U.S.A. & CANADA MODEL ONLY

CAUTION

TO PREVENT ELECTRIC SHOCK DO NOT USE THIS (POLARIZED) PLUG WITH AN EXTENSION CORD, RECEPTACLE OR OTHER OUTLET EXPOSURE

● POUR LE MODELE CANADIEN UNIQUEMENT

ATTENTION

POUR PREVENIR LES CHOCES ELECTRIQUES NE PAS UTILISER CETTE FICHE POLARISEE AVEC UN PROLONGATEUR UNE PRISE DE COURANT OU UNE AUTRE SORTIE DE COURANT SAUF SI LES LAMES PEUVENT ETRE INSEREES A FOND SANS EN LAISSER AUCUNE PARTIE A DECOUVERT

● DECLARATION OF CONFORMITY

We declare under our sole responsibility that this product, to which this declaration relates, is in conformity with the following standards:
EN60065, EN55013, EN55020, EN60555-2 and EN60555-3
Following the provisions of 73/23/EEC, 89/336/EEC and 93/68/EEC Directive.

● ÜBEREINSTIMMUNGSKLÄRUNG

Wir erklären unter unserer Verantwortung, daß dieses Produkt, auf das diese Erklärung bezieht, den folgenden Standards entspricht:
EN60065, EN55013, EN55020, EN60555-2 und EN60555-3
Entsprechend den Bestimmungen der Direktive 73/23/EEC, 89/336/EEC und 93/68/EEC.

● DECLARATION DE CONFORMITE

Nous déclarons sous notre seule responsabilité que l'appareil, auquel se réfère cette déclaration, est conforme aux standards suivants:
EN60065, EN55013, EN55020, EN60555-2 et EN60555-3
D'après les dispositions de la Directive 73/23/EEC, 89/336/EEC et 93/68/EEC.

● DICHIARAZIONE DI CONFORMITÀ

Dichiaro con piena responsabilità che questo prodotto, al quale la nostra dichiarazione si riferisce, è conforme alle seguenti norme:
EN60065, EN55013, EN55020, EN60555-2 e EN60555-3
In conformità con le condizioni della direttiva 73/23/EEC, 89/336/EEC e 93/68/EEC.
QUESTO PRODOTTO È CONFORME
A.D.M. 26/09/95 N. 549

● DECLARACIÓN DE CONFORMIDAD

Declaramos bajo nuestra exclusiva responsabilidad que este producto al cual esta declaración se refiere, está conforme con los siguientes estándares:
EN60065, EN55013, EN55020, EN60555-2 y EN60555-3
Seguando las provisiones de las Directivas 73/23/EEC, 89/336/EEC y 93/68/EEC.

● EENVORMIGHEIDSVERKLARING

Wij verklaren uitsluitend op onze verantwoordelijkheid dat dit product, waarop deze verklaring betrekking heeft, in overeenstemming is met de volgende normen:
EN60065, EN55013, EN55020, EN60555-2 en EN60555-3
Volgens de bepalingen van de Richtlijnen 73/23/EEC, 89/336/EEC en 93/68/EEC.

● ÖVERENSTÄMMELSESYNTYG


Härmed intygas: helt på eget ansvar att denna produkt, vilken detta intyg avser, uppfyller följande standarder:
EN60065, EN55013, EN55020, EN60555-2 och EN60555-3
Enligt bestämmelserna i direktiv 73/23/EEC, 89/336/EEC och 93/68/EEC.

● DECLARAÇÃO DE CONFORMIDADE



Declaramos sob a nossa exclusiva responsabilidade que este produto, ao qual esta declaração corresponde, está em conformidade com as seguintes normas:
EN60065, EN55013, EN55020, EN60555-2 e EN60555-3
De acordo com o estabelecido nas Directivas 73/23/EEC, 89/336/EEC e 93/68/EEC.

SAFETY INSTRUCTIONS

1. Read instructions – All the safety and operating instructions should be read before the appliance is operated.
2. Retain instructions – The safety and operating instructions should be retained for future reference.
3. Heed warnings – All warnings on the appliance and in the operating instructions should be adhered to.
4. Follow instructions – All operating and use instructions should be followed.
5. Water and Moisture – The appliance should not be used near water – for example, near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool, and the like.
6. Cords and Stands – The appliance should be used only with a cord or stand that is recommended by the manufacturer.
- 6A. An appliance and cart combination should be moved with care. Quick stops, excessive force, and uneven surfaces may cause the appliance and cart combination to overturn.
7. Wall or Ceiling Mounting – The appliance should be mounted to a wall or ceiling only as recommended by the manufacturer.
8. Ventilation – The appliance should be situated so that its location or position does not interfere with its proper ventilation. For example, the appliance should not be situated on a bed, sofa, rug, or similar surface that may block the ventilation openings, or placed in a built-in installation, such as a bookcase or cabinet that may impede the flow of air through the ventilation openings.
9. Heat – The appliance should be situated away from heat sources such as radiators, heat registers, stoves, or other appliances (including amplifiers) that produce heat.
10. Power Sources – The appliance should be connected to a power supply only of the type described in the operating instructions or as marked on the appliance.
11. Grounding or Polarization – Precautions should be taken so that the grounding or polarization means of an appliance is not defeated.
12. Power-Cord Protection – Power-supply cords should be routed so that they are not likely to be walked on or run over by items placed upon or against them, paying particular attention to cords at plugs, convenience receptacles, and the point where they exit from the appliance.
14. Cleaning – The appliance should be cleaned only as recommended by the manufacturer.
15. Power Lines – An outdoor antenna should be located away from power lines.
16. Outdoor Antenna Grounding – If an outside antenna is connected to the receiver, be sure the antenna system is grounded so as to provide some protection against voltage surges and built-up static charges. Article 810 of the National Electrical Code, ANSI/NFPA 70, provides information with regard to proper grounding of the mast and supporting structure, grounding of the lead-in wire to an antenna-discharge unit, size of grounding conductors, location of antenna-discharge unit, connection to grounding electrodes, and requirements for the grounding electrode. See Figure A.
17. Nonuse Periods – The power cord of the appliance should be unplugged from the outlet when left unused for a long period of time.
18. Object and Liquid Entry – Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.
19. Damage Requiring Service – The appliance should be serviced by qualified service personnel when:
 - A. The power-supply cord or the plug has been damaged, or
 - B. Objects have fallen, or liquid has been spilled into the appliance, or
 - C. The appliance has been exposed to rain, or
 - D. The appliance does not appear to operate normally or exhibits a marked change in performance, or
 - E. The appliance has been dropped, or the enclosure damaged.
20. Servicing – The user should not attempt to service the appliance beyond that described in the operating instructions. All other servicing should be referred to qualified service personnel.

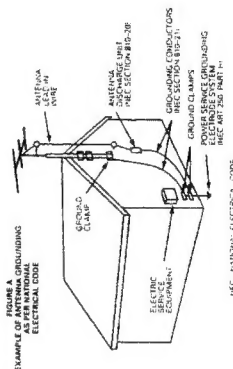


- NOTA:**
1. Mantenga siempre activado el interruptor de alimentación (POWER) en la unidad principal.
 2. Encienda y apague el equipo desde la unidad de control remoto.
 3. Cuando la unidad vaya a estar fuera de uso por un periodo prolongado de tiempo, desconecte el cable de alimentación.
- PRECAUCIÓN:**
Si solo el LED MUTE/STANDBY (silenciamiento/estado de espera) está encendido, significa que la alimentación ha sido desconectada desde la unidad de control remoto. En este caso, conecte la alimentación desde la unidad de control remoto.
- OPMERKING:**
1. Zorg er altijd voor dat de stroomschakelaar (POWER) van het hoofd toestel in de ingeschakelde stand staat.
 2. Schakel de stroom in en uit met de afstandsbediening.
 3. Wanneer de afstandsbediening niet meer werkt, moet het toestel gedurende een lange periode niet te gebruiken.
- WAARSCHUWING:**
Als alleen het LED MUTE/STANDBY (LED lampje) (stand-by) licht oplicht, betekent dit dat de spanning is uitgeschakeld door de afstandsbediening. Schakel de spanning in met de afstandsbediening.
- OBSERVERA:**
1. Låt alltid strömsvaret (POWER) på huvudenten vara påslagen.
 2. Låt alltid strömmen med hjälp av fjärrkontrollen.
 3. Koppla loss strömladden om apparaten inte skall användas under lång tid.
- WARNING:**
If only the MUTE/STANDBY indicator light is lit, it means that the power has been disconnected from the remote control. In this case, connect the power from the remote control again.
- NOTA:**
1. Mantenga o interruptor da Corrente (POWER) na unidade principal sempre ligado.
 2. Ligue e desligue a corrente a partir da unidade de controlo remoto.
 3. Quando o aparelho não for utilizado, mantenha não utilizar a unidade por longo tempo.
- CAUTELA:**
Se apenas o LED MUTE/STANDBY (semáforo, símbolo, indicador) que a corrente está desligada a partir da unidade de controlo remoto, ligará a corrente a partir da unidade de controlo remoto.
- PRECAUCIONES A TOMAR DURANTE LA INSTALACIÓN:**
Para que el cable se deslice, debe por lo menos 10 cm de espacio entre las partes superior, posterior y laterales de esta unidad y la pared u otros componentes.
- VOORZORGSMAATREGELEN VOOR INSTALLATIE:**
Laat voor een goede warmteafvoer minstens 10 cm ruimte tussen de boven-, achter- en zijden van de toestel en de muur of andere elementen.
- OBSERVERA VID INSTALLATIONEN:**
För god värmeavledning, bör du lämna ett utrymme på minst 10 cm mellan bak-, om och på sidorna av apparaten och väggen eller andra komponenter.
- PRECAUCOES DE INSTALACAO:**
Para a dissipacao de calor, deixar pelo menos 10 cm de espaco entre o topo, a parte de tras e os lados desta unidade e a parede ou outros componentes.
- NOTE:**
1. Always keep the POWER switch on the main unit turned on.
 2. Turn the power on and off from the remote control unit.
 3. Unplug the power cord when you do not plan to use the unit for a long period of time.
- CAUTION:**
If only the MUTE/STANDBY LED is lit, it means that the power is turned off from the remote control unit. Turn the power on from the remote control unit.
- HINWEIS:**
Sicher, Sie den Netzschalter (POWER) am Hauptgerät stets eingeschaltet lassen. Schalten Sie das Netzabbl vom Fernabbl ein und aus.
- VORSICHT:**
Wenn nur das MUTE/STANDBY LED leuchtet, bedeutet dies, daß der Strom vom Fernbedienungsgerät aus ausgeschaltet worden ist. Schalten Sie den Strom vom Fernbedienungsgerät aus ein.
- REMARQUE:**
S'assurer que le commutateur d'alimentation (POWER) sur l'unité principale est toujours dans la position active.
1. Allumer et éteindre la position active à l'aide du télécommande.
 2. Débrancher le cordon d'alimentation lorsque l'appareil ne sera pas utilisé pendant une longue période.
- ATTENTION:**
Si seul l'indicateur MUTE/STANDBY est allumé, en code, cela signifie que l'alimentation a été coupée depuis la télécommande. Mettre sous tension avec la télécommande.
- NOTA:**
1. Tenete sempre l'interruttore della corrente (POWER) dell'unità principale nella posizione accesa.
 2. Accendete e spegnete la corrente usando il telecomando.
 3. Scollegate il filo d'alimentazione quando avrete intenzione di non usare l'apparecchio per un lungo periodo.
- AVVERTENZE:**
Se solo il LED di accensione/attesa (MUTE/STANDBY) è illuminato, il rasoio da rasoio che il rasoio è stato spento usando il telecomando. Raccendete il rasoio usando il telecomando.
- PRECAUTIONS FOR INSTALLATION:**
To prevent overheating, leave at least 10 cm of space between the top, back and sides of this unit and the wall or other components.
- SICHERHEITSMASSNAHMEN BEIM EINBAU:**
Lassen Sie zur Wärmeverteilung mindestens 10 cm Raum zwischen der Ober-, Rück- und Seiten des Gerätes und der Wand oder anderen Komponenten.
- PRECAUTIONS D'INSTALLATION:**
Pour une bonne dissipation de la chaleur, laissez un espace d'au moins 10 cm entre le haut, l'arrière et les côtés de cet appareil et le mur ou un autre composant.
- PRECAUZIONI PER L'INSTALLAZIONE:**
Per una buona dissipazione del calore, lasciare uno spazio di almeno 10 cm tra la parte superiore, posteriore e laterali di quest'unità e la parete o gli altri componenti.



Cautions on Connections

- Do not plug in the power cord until all connections are completed.
- Be sure to connect the left and right channels properly.
- Insert the plugs securely. Incomplete connections can result in noise.
- Use the SWITCHED AC OUTLETS to plug in audio components. Do not use them for hair dryers or other appliances.

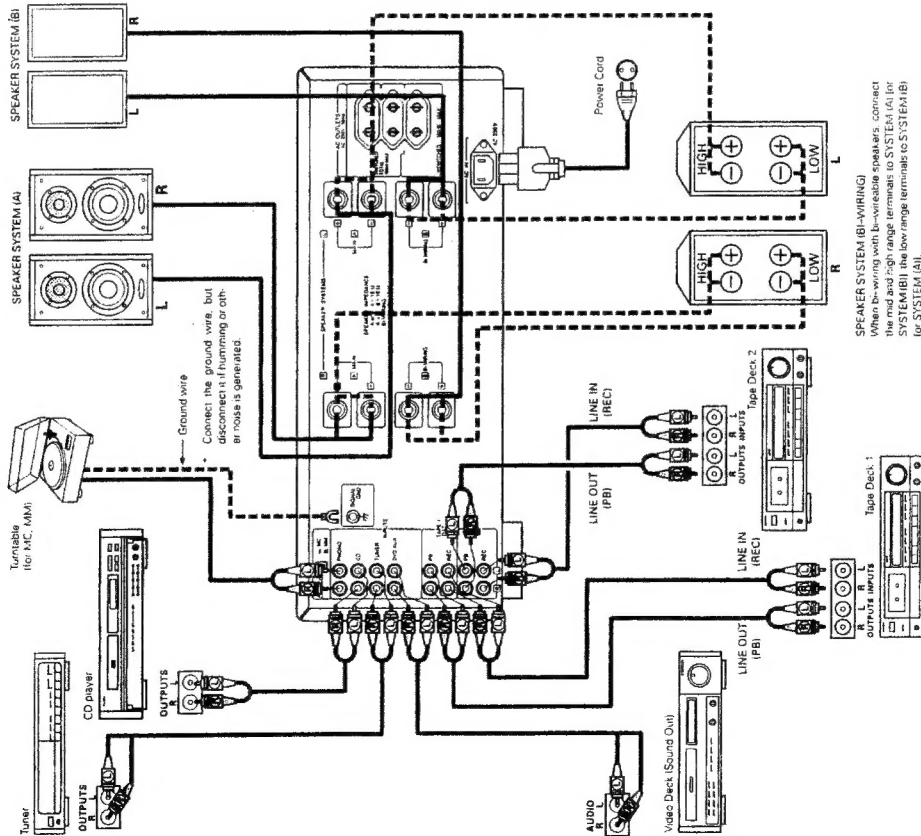

SPEAKER SYSTEM (B) WIRING
When bi-wiring with bi-wireable speakers, connect the mid and high range terminals to SYSTEM (A) for SYSTEM (B). The low range terminals to SYSTEM (B) for SYSTEM (A).

3 OPERATION (Refer to Page 5)

PREPARATION

- CHECKING CONNECTIONS**
 - Make sure that all the connections are proper by referring to the rear panel.
 - Check the polarity (positive and negative) of connections, and the direction of stereo separation (right cord to right channel terminal, and left cord to left channel terminal).
 - Check the direction of pin cord connection.

2. SETTING OF EACH KNOB

- Turn the volume control knob 7 counterclockwise to minimum position.
- Set the rotary knob 4, 5, 6 to center position.
- Set SOURCE DIRECT 10 to "OFF".

After checking the above items, turn on the power, the amplifier is set in the ready mode in a few seconds.

PLAYING A RECORD

- Set the CARTRIDGE selection switch 10 "MC (1)" or "MM (1)".
- Set the INPUT SELECTOR switch 9 to "PHONO".
- Operate the turntable and play the record.
- Turn the volume 7 and tone controls 4, 5, 6 to yield an appropriate volume and sound quality.

PLAYBACK OF CD PLAYER

- Set the INPUT SELECTOR switch 9 to "CD".
- Operate the CD player.
- Turn the volume 7 and tone controls 4, 5, 6 to yield an appropriate volume and sound quality.

RECEPTION OF RADIO PROGRAMS

- Set the INPUT SELECTOR switch 9 to "TUNER".
- Operate the tuner to receive a radio program.
- Turn the volume 7 and tone controls 4, 5, 6 to yield an appropriate volume and sound quality.

CONNECTIONS OF AUDIO EQUIPMENT TO AUX TERMINALS

- Set the INPUT SELECTOR switch 9 to "DVD/AUX" position.
- Operate the Audio equipment Systems.
- Turn the volume 7 and tone controls 4, 5, 6 to yield an appropriate volume and sound quality.

PLAYBACK WITH TAPE DECK

- Set the INPUT SELECTOR switch 9 to "TAPE-1/DAT" or "TAPE-2/MD".
- Operate the Tape Deck.
- Turn the volume 7 and tone controls 4, 5, 6 to yield an appropriate volume and sound quality.

RECORDING WITH TAPE DECK

- Set the REC OUT SELECTOR switch 8 to the program source you wish to record.
 - Start the playback of the program source.
 - Start recording with the component connected to "TAPE-1/DAT" or "TAPE-2/MD".
- In the PMA-2000R, the REC OUT signal and the speaker head-phones signal are output via separate circuits so that knobs and switches related to the tone and volume have no effect whatsoever on the sound that is recorded. Also, since the recording function is selected by the REC OUT SELECTOR switch 8, the free program source can be played through the speakers (or headphones) even during recording.

MONITORING THE RECORDING

- A recording in progress can be monitored if a tape deck with three individual heads for recording and playback is used. A tape deck in which a common head is used for both recording and playback cannot be used to monitor recording. When a recording is being made using TAPE-1/DAT, selecting TAPE-1/DAT with the INPUT SELECTOR will engage the RECORDING MONITOR and permit a check of the recording condition.

COPYING FROM ONE TAPE TO ANOTHER

- To copy from TAPE-1/DAT to TAPE-2/MD, set the REC OUT SELECTOR switch 8 to "TAPE-1" > "2".

NOTE:
Copying is not possible from TAPE-2/MD to TAPE-1/DAT.

NOTE:

- This amplifier has a full memory back-up system. When the power is turned on, INPUT SELECTOR 9 are set to the last mode set before the power was turned off.

1 DESIGNATIONS AND FUNCTIONS OF PANEL CONTROLS (Refer to Page 5)

- 1 **POWER (Power Switch)**
When the power switch is turned ON (I), the MUTE / STANDBY LED (I) lights.
When the power switch is turned ON, power is supplied to the unit. It takes a few seconds after the power is turned on for the unit to warm up. This is due to the built-in muting circuit that eliminates noise during the on/off operation.
- 2 **REMOTE SENSOR (Remote Control Sensor)**
This sensor receives the infra-red light transmitted from the wireless remote control unit.
For remote control, point the wireless remote control unit towards the sensor.
- 3 **PHONES (Headphone Jack)**
This jack is used to plug in the headphones.
(The SPEAKER output is turned off when the headphones are plugged in.)
To prevent hearing loss, do not raise the volume level excessively when using headphones.
- 4 **BASS (Bass Control)**
This knob is used to control the bass quality of the sound. When the knob is set at the center position, the frequency characteristics are balanced in the range below 1000 Hz. The bass is emphasized as the knob is moved off center to the right (↗), and reduced as it is moved to the left (↖).
- 5 **TREBLE (Treble Control)**
This knob is used to control the treble quality of the sound. When the knob is set at the center position, the frequency characteristics are balanced in the range above 1000 Hz. The treble is emphasized as the knob is moved off center to the right (↗), and reduced as it is moved to the left (↖).
- 6 **BALANCE (Balance Control)**
This knob is used to adjust the balance between the left and right channels. When it is set to the center position, the amplitude of the amplifier is equal on both sides. If there is a difference in the left and right channel output voltages for a cartridge, move the knob to the left and the right to adjust it. If the volume on the right side is too low, turn the knob to the right (↗). If the volume on the left side is too low, turn the knob to the left (↖). This will achieve an even balance on the left and right sides.
- 7 **VOLUME (Volume Control)**
This knob controls the overall volume level.
Turn the knob to the right (↗) to raise the volume and to the left (↖) to lower it.
- 8 **REC OUT SELECTOR (Recording Output Selector)**
Use this to select the output source for recording onto a tape deck, etc.
You can copy TAPE-1/DAT source to the tape deck connected to the TAPE-2/MD terminals.
• **OFF:** In this position, the recording output is turned off. For higher quality playback sound, we recommend keeping the selector at this position when not recording.

- **AUX:** Used to recording component that connected to the DVD/AUX terminals.
 - **TUNER:** Used to recording from the tuner.
 - **CD:** Used to recording from the CD player.
 - **PHONO:** Used to recording from the turntable.
 - **TAPE-1 / 2:** Used to recording from the turntable.
 - **(COPY)** Use this position when making copies of tapes using two tape decks. The input signal from the deck connected to the TAPE-1/DAT input terminals is fed to the TAPE-2/MD REC-OUT terminals.
- NOTE:** Copying is not possible from TAPE-2/MD to TAPE-1/DAT.
- 3 **INPUT SELECTOR (Input Select Switch)**
Use these to select the program source.
When the switch for the desired program source is selected, its LED lights. One program source only can be selected at a time, as follows:
 - **PHONO:** Use this position when using the record player connected to the PHONO terminals.
Use the CARTRIDGE selection switch (16) to switch the sensitivity to correspond to the cartridge type being used.
 - **CD:** Used to listen a compact disc player or other component that is connected to the CD terminals.
 - **TUNER:** Used to play a component such as an FM/AM tuner or a TV tuner that is connected to the TUNER terminals.
 - **DVD / AUX:** Used to play a component such as a HIFI video player, TV tuner or tape deck that is connected to the DVD/AUX terminals.
 - **TAPE-1 / DAT:** Use this position when using the tape deck, etc., connected to the TAPE-1/DAT terminals.
 - **TAPE-2 / MD:** Use this position when using the tape deck, etc., connected to the TAPE-2/MD terminals.
 - 10 **SOURCE DIRECT (Source Direct Switch)**
The controls (BASS (4), TREBLE (5) and BALANCE (6)) can be used when this switch is in the OFF (I) position.
When set to the ON (II) position, the above controls are bypassed and the signals are input directly to the volume control circuit, providing high quality sound.
 - 11 **MUTE / STANDBY LED**
This LED flashes while the muting circuit is activated when the power is turned on and while the muting is turned on from the remote control unit, and remains lit (without flashing) while the power switch (1) is turned ON (I).

12 INPUTS terminals

These are input terminals for CD players, turntables, AM/FM tuners, tape decks or other playback components.

NOTE:
The PHONO input terminals are equipped with a short pin-plug. Remove this plug to connect a record player. Store the removed short pin-plug in a safe place so as not to lose it.

13 TAPE REC (recording output) terminals

These are recording output terminals for connection to tape decks.

14 SPEAKER SYSTEMS terminals

Connect the speaker systems here.

15 AC IN connector

Connect the included AC power cord here.

Do not use any other cord than the provided AC power cord.

16 AC OUTLETS

AC outlets are used for connecting amplifier component units, such as tuner, turntable, tape deck, etc.

- **SWITCHED** Total capacity: 100 W.
These outlets are turned ON/OFF when main power switch is turned on/off.
- **UNSWITCHED** Capacity: 100 W.
This outlet is always ON whether power switch is on or off.

17 SIGNAL GND (ground) terminal

Connect the turntable's ground wire here.

NOTE:
This terminal is used to reduce noise when a turntable, etc., is connected.
It does not provide complete grounding.

18 CARTRIDGE (Cartridge Selection Switch)

This switch is set according to the type of player cartridge to be used.
Set this switch to MM (I), MC (II) or MC (III) according to the type of cartridge used on your turntable.

2 CONNECTIONS

Connecting the speakers

- **Speaker impedance**
 - When using speaker systems A and B separately, speakers with an impedance of 4 to 16 Ω/ohms can be connected.
 - When bi-wiring with bi-wirable speaker system, speakers with an impedance of 4 to 16 Ω/ohms can be connected.
 - Note that when using two sets of speaker systems together (A + B), using speakers with an impedance other than between 8 to 16 Ω/ohms can result in damage.
- Note that this unit is not equipped with a switch for selecting the speaker system. The A and B speaker output terminals are connected in parallel.
- The protective circuit may be activated if speakers with other impedances are connected.
- Be sure to connect the cords between the speaker terminals and speaker systems with the same polarities (⊕ to ⊕, ⊖ to ⊖). If not, the central sound will be weak and the position of the different instruments will not be clear, diminishing the stereo effect.
- When connecting the speakers, be sure that the core wires of the speaker cords do not stick out from the terminals and touch other terminals, each other or the rear panel.
- Connecting the speaker cords
 - ① Peel off the sheathing from the end of the cord
 - ② Twist the core wires.
 - ③ Turn the speaker terminal counterclockwise to loosen it.
 - ④ Insert the core wires entirely, then turn the terminal clockwise to tighten it.

CAUTION

Protective Circuit

This set is equipped with a high speed protective circuit. This circuit protects the internal circuitry from damage due to large currents flowing when the speaker jacks are not completely connected or when an output is generated by a short circuit. This protective circuit's operation cuts off the output to the speakers. In such a case, be sure to turn the power to the set off and check the connections to the speakers. Then turn the power on again. After muting for several seconds, the set will operate normally.

NOTE:
NEVER touch the speaker terminals when the power is on. Doing so could result in electric shocks.

5 TROUBLESHOOTING

Check the following before assuming there is a problem with the set.

1. Are all connections proper?
2. Is the set being operated as described in the operating instructions?
3. Are the speakers and input components being operated properly?

If the set does not seem to be operating properly, check the points listed below. If these points do not apply, the set may be damaged. Turn off the power immediately and contact your store of purchase.


	Symptom	Cause	Measures	Page
Common problems arising when listening to the CD records, tapes and FM broadcasts, etc.	MUTE/STANDBY LED does not light and no sound is produced when POWER switch is turned on.	<ul style="list-style-type: none">Power cord is not connected.	<ul style="list-style-type: none">Check that the cord is plugged in.	10
	MUTE/STANDBY LED lights but no sound is produced	<ul style="list-style-type: none">Speaker cords not properly connected.INPUT SELECTOR not set to proper position.VOLUME control turned down.	<ul style="list-style-type: none">Connect securely.Set to the proper position.Set to an appropriate level.	9, 10 8, 11 8, 11
	Sound is not produced from one side only	<ul style="list-style-type: none">Speaker cords not properly connected.Input cords not properly connected.Left/right balance improperly adjusted.	<ul style="list-style-type: none">Connect securely.Connect securely.Adjust the BALANCE control.	9, 10 10 8, 11
	Volume level is different when listening to tuner and records.	<ul style="list-style-type: none">Tuner and record outputs different.	<ul style="list-style-type: none">Adjust the tuner output to the turntable's output (if the tuner is equipped with an output control).	—
Problems occurring when playing records.	Positions of instruments inverted for stereo sources	<ul style="list-style-type: none">Left and right speakers or input cords inverted.	<ul style="list-style-type: none">Check the left/right connections.	9, 10
	Booming sound produced when playing records	<ul style="list-style-type: none">Turntable's ground wire not connected.Input cords not properly connected to PHONO terminals.Influence from a TV or VCR near the turntable.	<ul style="list-style-type: none">Connect securely.Connect securely.Change the position of installation.	10 10 —
	Howling produced when volume is turned up while playing records.	<ul style="list-style-type: none">Turntable and speaker systems are too close.Floor is soft and vibrates easily.	<ul style="list-style-type: none">Move speaker systems as far away as possible.Use cushions to absorb the vibrations transmitted from the floor to the speakers. If the turntable does not include insulators, use audio insulators, available in stores.	— —
	Sound is distorted.	<ul style="list-style-type: none">Stylus pressure is too light.Dirt on tip of stylus.Defective cartridge.	<ul style="list-style-type: none">Apply proper pressure.Check the tip of the stylus.Replace the cartridge.	— — —
Remote control unit	This unit does not operate properly when remote control unit is used.	<ul style="list-style-type: none">Batteries dead.Remote control unit too far from this unit.	<ul style="list-style-type: none">Replace with new batteries.Move closer.	12 12
		<ul style="list-style-type: none">Obstacle between this unit and remote control unit.	<ul style="list-style-type: none">Remove obstacle.	12
		<ul style="list-style-type: none">Different button is being pressed.Ⓐ and Ⓑ ends of battery inserted in reverse.	<ul style="list-style-type: none">Press the proper button.Insert batteries properly.	13 12

4 REMOTE CONTROL OPERATION


The accessory Remote Control Unit is used to control the amplifier from a convenient distance

(1) Inserting the Dry Cell Batteries


- 1 Remove the battery cover on the Remote Control Unit.




- 2 Insert two dry cell batteries as shown in the diagram on the battery supply unit.



- 3 Replace the battery cover.



(2) Directions for use



- Operate the Remote Control Unit while pointing it towards the Remote Control Sensor on the Amplifier as shown in the diagram on the left.
- The Remote Control Unit can be used at distances up to about 8 meters in a straight line from the amplifier. This distance will decrease if there are obstructions blocking the infra-red light transmission or if the Remote Control Unit is not directed straight at the amplifier.

Note on operation

- Do not press the operating buttons on the Amplifier and the Remote Control Unit at the same time. This will cause misoperation.
- Operation of the Remote Control Unit will become less effective or erratic if the Infrared Remote Control Sensor on the Amplifier is exposed to strong light or if there are obstructions between the Remote Control Unit and the sensor.
- In case you operate a VCR, TV or other components by remote control, do not operate buttons on two different remote control units at the same time. This will cause misoperation.

Besides being able to operate the PMA-2000R integrated-amplifier with this Remote Control Unit, you can also operate a DENON cassette deck and CD player from this handy full-system Remote Control Unit.

Remote control section

Full-system Remote Control Unit

The full-system Remote Control Unit operates all major functions of the Amplifier, such as function switching, volume control. But that's not all! The same control pad can also control the major functions of a DENON CD player and cassette deck and tuner when combined with the PMA-2000R to create a remarkably ergonomic and versatile DENON system with all the quality sound reproduction that the devoted audiophile expects.

Remote Control Unit RC-176 supplied with the PMA-2000R

1 POWER button

This button can be used to turn on and off the power of the amplifier. LED ① will go out when the power is switched off. However, the power for the amplifier turned on and off if it is in the power standby mode and the power cord is plugged in.

This button will not function if there is a power failure, if the power cord is not plugged in, or when using an audio tuner.


This button can be used when the MUTE/STANDBY LED ③ is lit.

2 MUTE button

Pressing this switch will activate the muting condition and no signals will be output to the speakers.

Other buttons

Other buttons are exclusively for the PMA-2000R, and function in the same way as the corresponding buttons on the set.

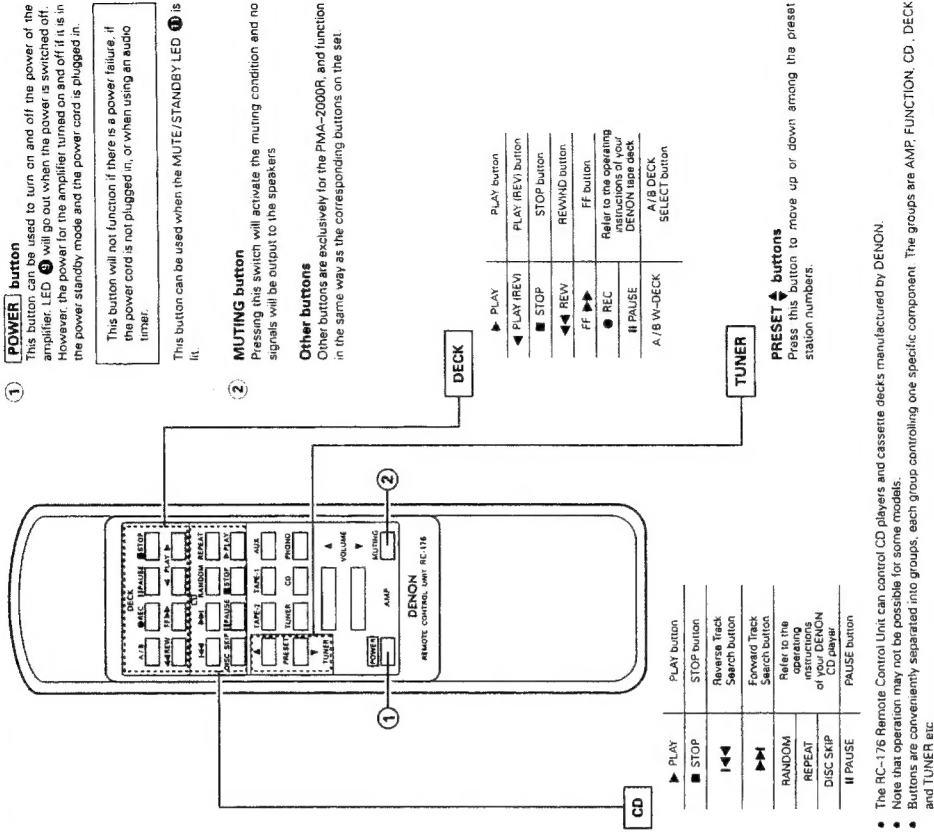

For details on operating other components, refer to the operating instructions for the CD player and/or cassette deck.

CAUTION:

- If the power is turned off with the Remote Control Unit, the set is switched to the power stand-by state. If you are absent for a long period of time, unplug the power cord.
- Only the MUTE/STANDBY LED ③ lights red when in the power stand-by mode.
- You may experience erratic operation of the Remote Control Unit if it is operated in fluorescent light and direct sunlight. In particular, if this light strikes the Remote Control Sensor on the Amplifier. However, this is not a malfunction, and if this should happen, simply protect the sensor against such light.

- The RC-176 Remote Control Unit can control CD players and cassette decks manufactured by DENON.

- Note that operation may not be possible for some models.


- Buttons are conveniently separated into groups, each group controlling one specific component. The groups are AMP, FUNCTION, CD, DECK and TUNER etc.

REMOVAL OF EACH SECTION

(Do reverse manner when assembling.)


1. Top Cover

Remove 10 screws (A), 4 screws (B) and detach the Top Cover in the arrow direction.

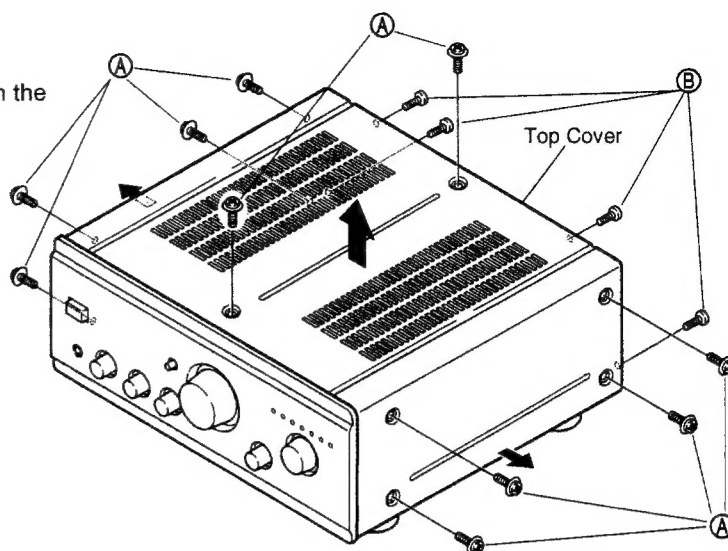


2. Front Panel

- 1) Remove 8 screws (C).
- 2) Pull out the knob (D) and remove the nut, then detach the panel in the arrow direction.

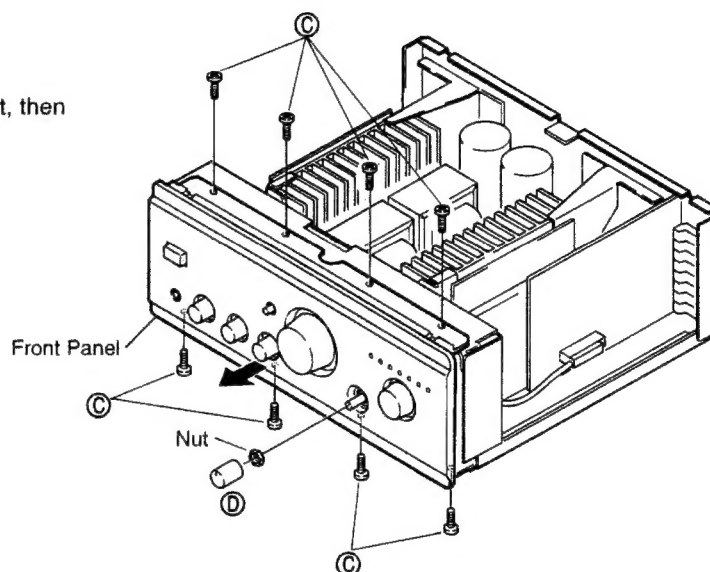

3. Bottom Plate

Remove 20 screws (E) and detach it in the arrow direction.

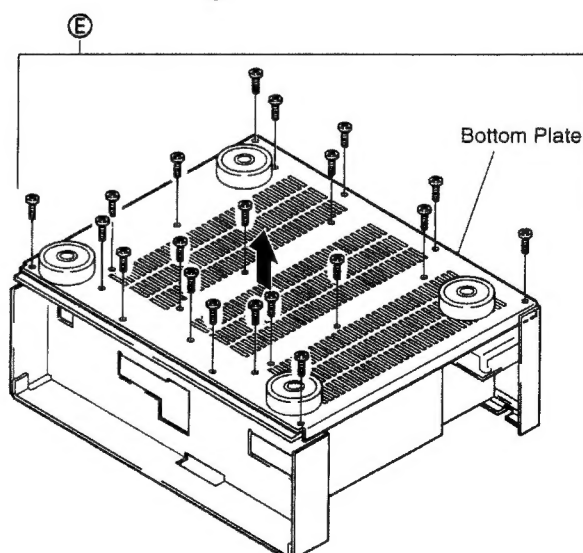

SPECIFICATIONS

• POWER AMPLIFIER SECTION

Rated Output Power:

Both channel driven (8 Ω /ohms Load)	80 W + 80 W
20 Hz to 20 kHz, T.H.D. 0.07% (4 Ω /ohms Load)	160 W + 160 W

DIN, 1 kHz, T.H.D. 0.7%

Total Harmonic Distortion:

(-3 dB at rated output, 8 Ω /ohms) (1 kHz)	0.01%
--	-------

• PRE AMPLIFIER SECTION

Rated Output:

(Recout Terminal)	150 mV
-------------------	--------

Input Sensitivity / Input Impedance:

The value in parentheses () refers to the input impedance when SOURCE DIRECT is ON.

PHONO:	MM: 2.5 m / 47 k Ω /ohms MC: 200 μ V / 100 Ω /ohms
CD, TUNER, DVD/AUX, TAPE-1/DAT, TAPE-2/MD	150 mV / 47 k Ω /ohms (150 mV / 13 k Ω /ohms)

RIAA Deviation:

PHONO:	20 Hz ~ 20 kHz
Within ± 0.3 dB	PHONO

Maximum Input:

MM: 130 mV / 1 kHz MC: 10 mV / 1 kHz

• OVERALL CHARACTERISTICS

SN Ratio (IHF A Network):

PHONO	
MM:	91 dB (at 5 mV input)

(input terminals short-circuited)

MC:	76 dB (at 0.5 mV input)
-----	----------------------------

SOURCE-DIRECT: ON

CD, TUNER, DVD/AUX TAPE-1/DAT, TAPE-2/MD:	110 dB
---	--------

Tone Control Adjustable Range:

BASS:	100 Hz ± 8 dB
TREBLE:	10 kHz ± 8 dB

• OTHERS

Power Supply: AC 230 V, 50 Hz

AC Outlets:

Switched $\times 2$:	100 W (Total)
Unswitched $\times 1$:	100 W

Power Consumption:

310 W (IEC)

Dimensions:

434 (W) \times 180 (H) \times 478 (D) mm
(17-3/32" \times 7-5/64" \times 18-13/16")

Net Weight:

20.0 kg (44 lbs 1 oz)

• REMOTE CONTROL UNIT (RC-176)

Remote control system: Infrared pulse system

Power supply: 3V DC, Two size R6P ("AA")
dry cell batteries

External dimensions: 55 (W) \times 194 (H) \times 18 (D) mm

(2-11/64" \times 7-41/64" \times 18-45/64")

Weight:


100 g (Approx. 3.5 oz)
(including batteries)

* Maximum dimensions include controls, jacks, and covers.

(W) = width, (H) = height, (D) = depth

• For improvement purposes, specifications and functions are subject to change without advanced notice.

METHOD OF ADJUSTMENTS

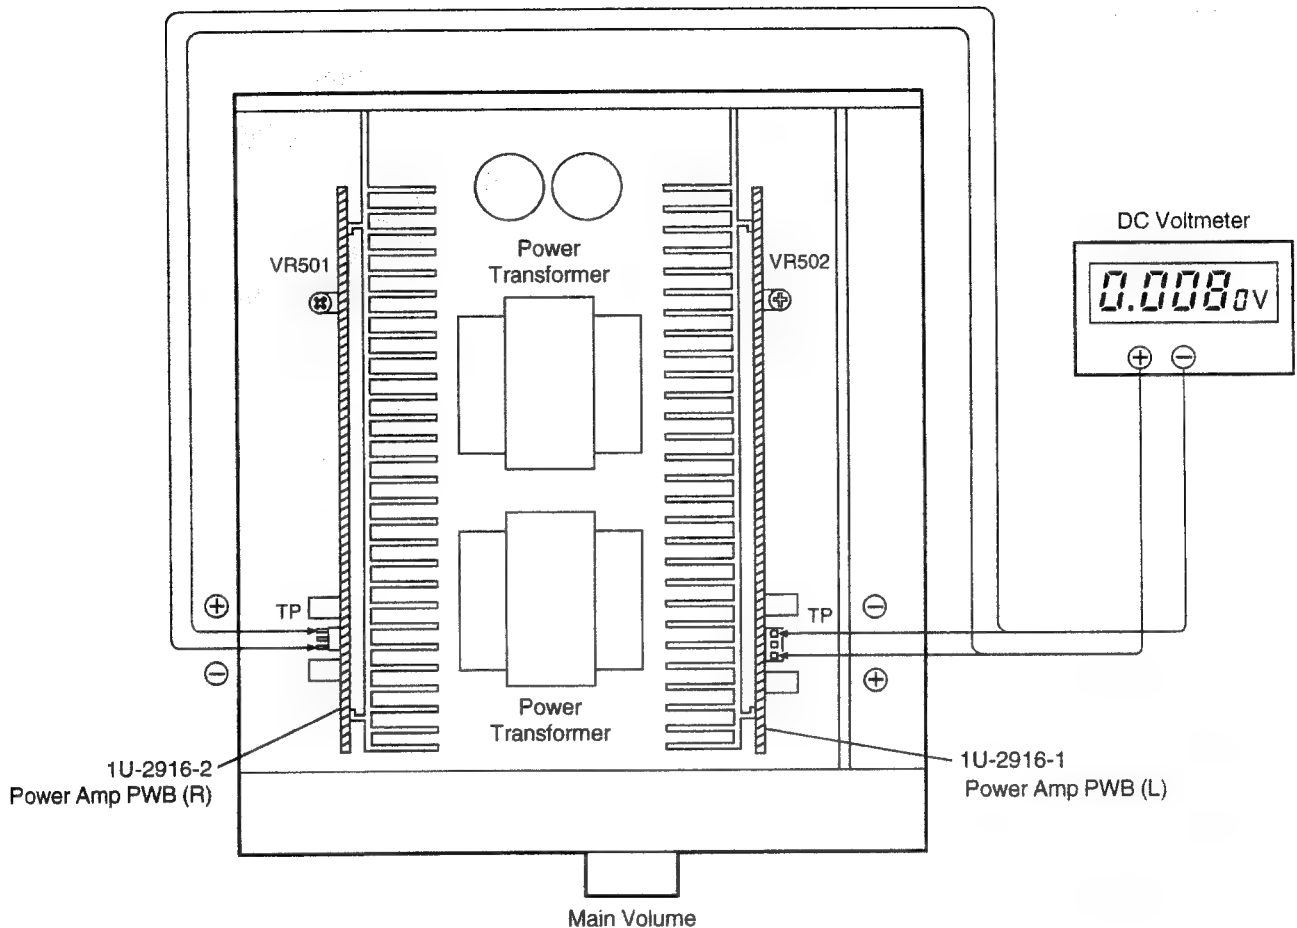

IDLING CURRENT

● Setup

1. Lay the unit at an ordinary position away from a direct current from an air condition or fan. Do the adjustment at a temperature between 15°C (59°F) and 30°C (86°F).
2. Set controls as follows.


POWER SWITCH	→ OFF (■)
VOLUME CONTROL	→ fully counterclockwise in the minimum position (↺). (Main Volume and Semifixed resistors [VR501, 502]).
SPEAKER Terminals	→ Open: do not connect the speakers, dummy load etc.

● Adjustment

1. Remove top cover. And then connect DC Voltmeter to test points of 1U-2916-1(Lch) and 1U-2916-2(Rch) Power Amp Printing Wiring Board.
2. Connect power cord to AC 230V (within the range 218 ~ 242V permissible) wall outlet, and turn POWER switch "ON" (■). Within 10 seconds turn VR501 (L ch) and VR502 (Rch) clockwise so that the DC Voltmeter reads 8 ± 0.5 mV.
3. Then after 2 minutes warmup adjust VR501 and VR502 so that the DC Voltmeter reads 10 ± 0.5 mV.
4. And after 10 minutes warmup adjust VR501 and VR502 so that the DC Voltmeter reads 10 ± 0.5 mV.


4. Rear Panel

- 1) Remove 4 screws (F), 8 screws (G) and 2 screws (H).
- 2) By lifting the right and left Heat Sink Ass'y to release hook in 2 places.
- 3) Detach the Rear Panel in the arrow direction.

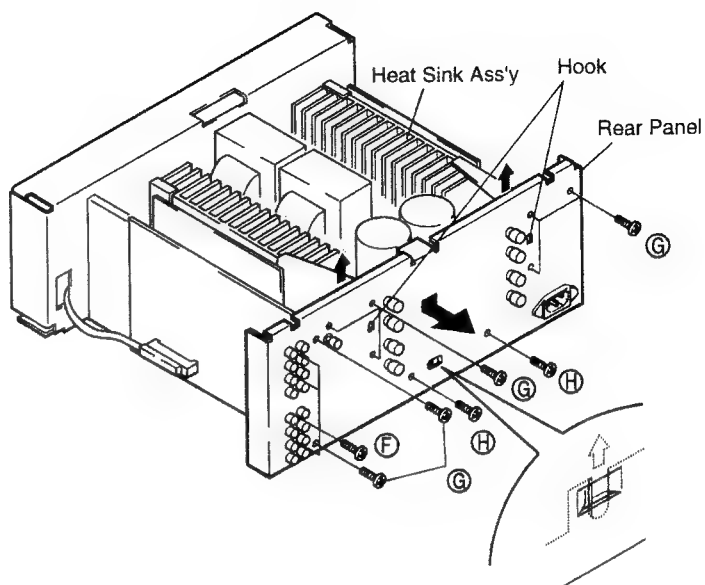

5. Heat Sink Ass'y


Remove 2 screws (I) and detach the Heat Sink Ass'y in the arrow direction.

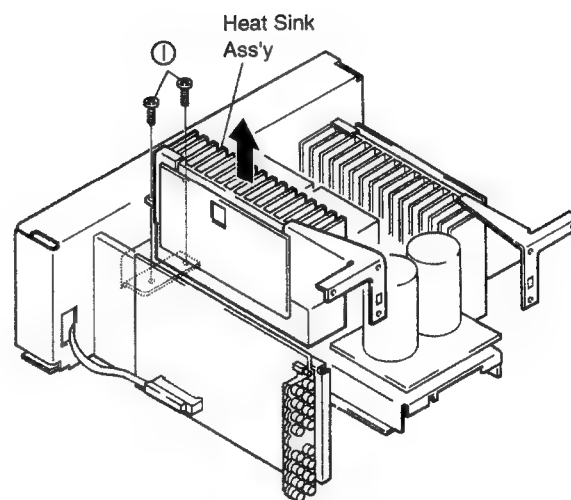

SEMICONDUCTORS

● IC's



HD404304A13P (IC101)

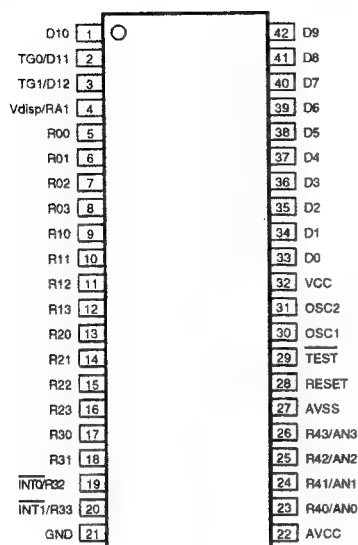


HD404304A13P Terminal Function

Pin No.	Symbol	I/O	Active	Function
1	D10	O	H	MUTE/STANDBY LED Indication
2	TG0/D11	O	H	Not used
3	TG1/D12	O	L	Power control (remote power ON/OFF)
4	Vdisp/RA1	I		Not used
5	R00	O		Not used
6	R01	O	L	Muting control (power ON/OFF, function shift, muting)
7	R02	O		Not used
8	R03	O		Not used
9	R10	O	H	Key output
10	R11	O	H	Key output
11	R12	O		Not used
12	R13	O		Not used
13	R20	I		Key Input
14	R21	I		Key Input
15	R22	I		Key Input
16	R23	I		Not used
17	R30	O	H	Key output
18	R31	O	H	Key output
19	INT0/R32	I		Detection input for power stop
20	INT1/R33	I		Decode input for remote control signal
21	GND			GND
22	AVCC			Avcc (Vcc)
23	R40/AN0			Not used
24	R41/AN1	I		Not used
25	R42/AN2	I		Not used
26	R43/AN3	I		Judgement port for prior use model
27	AVSS			Avss (GND)
28	RESET			Connect to external M51954AL
29	TEST			Vcc
30	OSC1			Control to external crystal oscillator (4MHz)
31	OSC2			Control to external crystal oscillator (4MHz)
32	VCC			Vcc
33	D0	O		Not used
34	D1	O		Not used
35	D2	O	H	TAPE-2 control
36	D3	O	H	TAPE-1 control
37	D4	O		Not used
38	D5	O	H	AUX control
39	D6	O	H	TUNER control
40	D7	O		Not used
41	D8	O	H	CD control
42	D9	O	H	PHONE control


LB1639 (IC102)

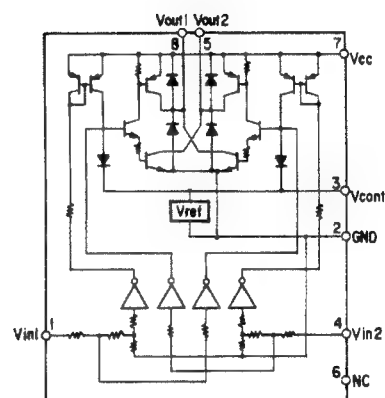


M51954AL (IC603)

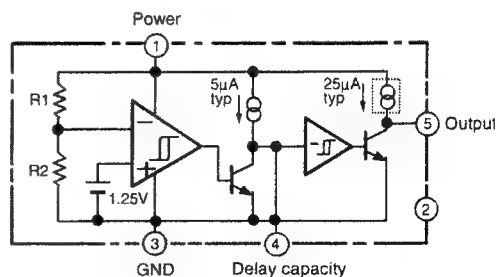


BLOCK AND LEVEL DIAGRAM


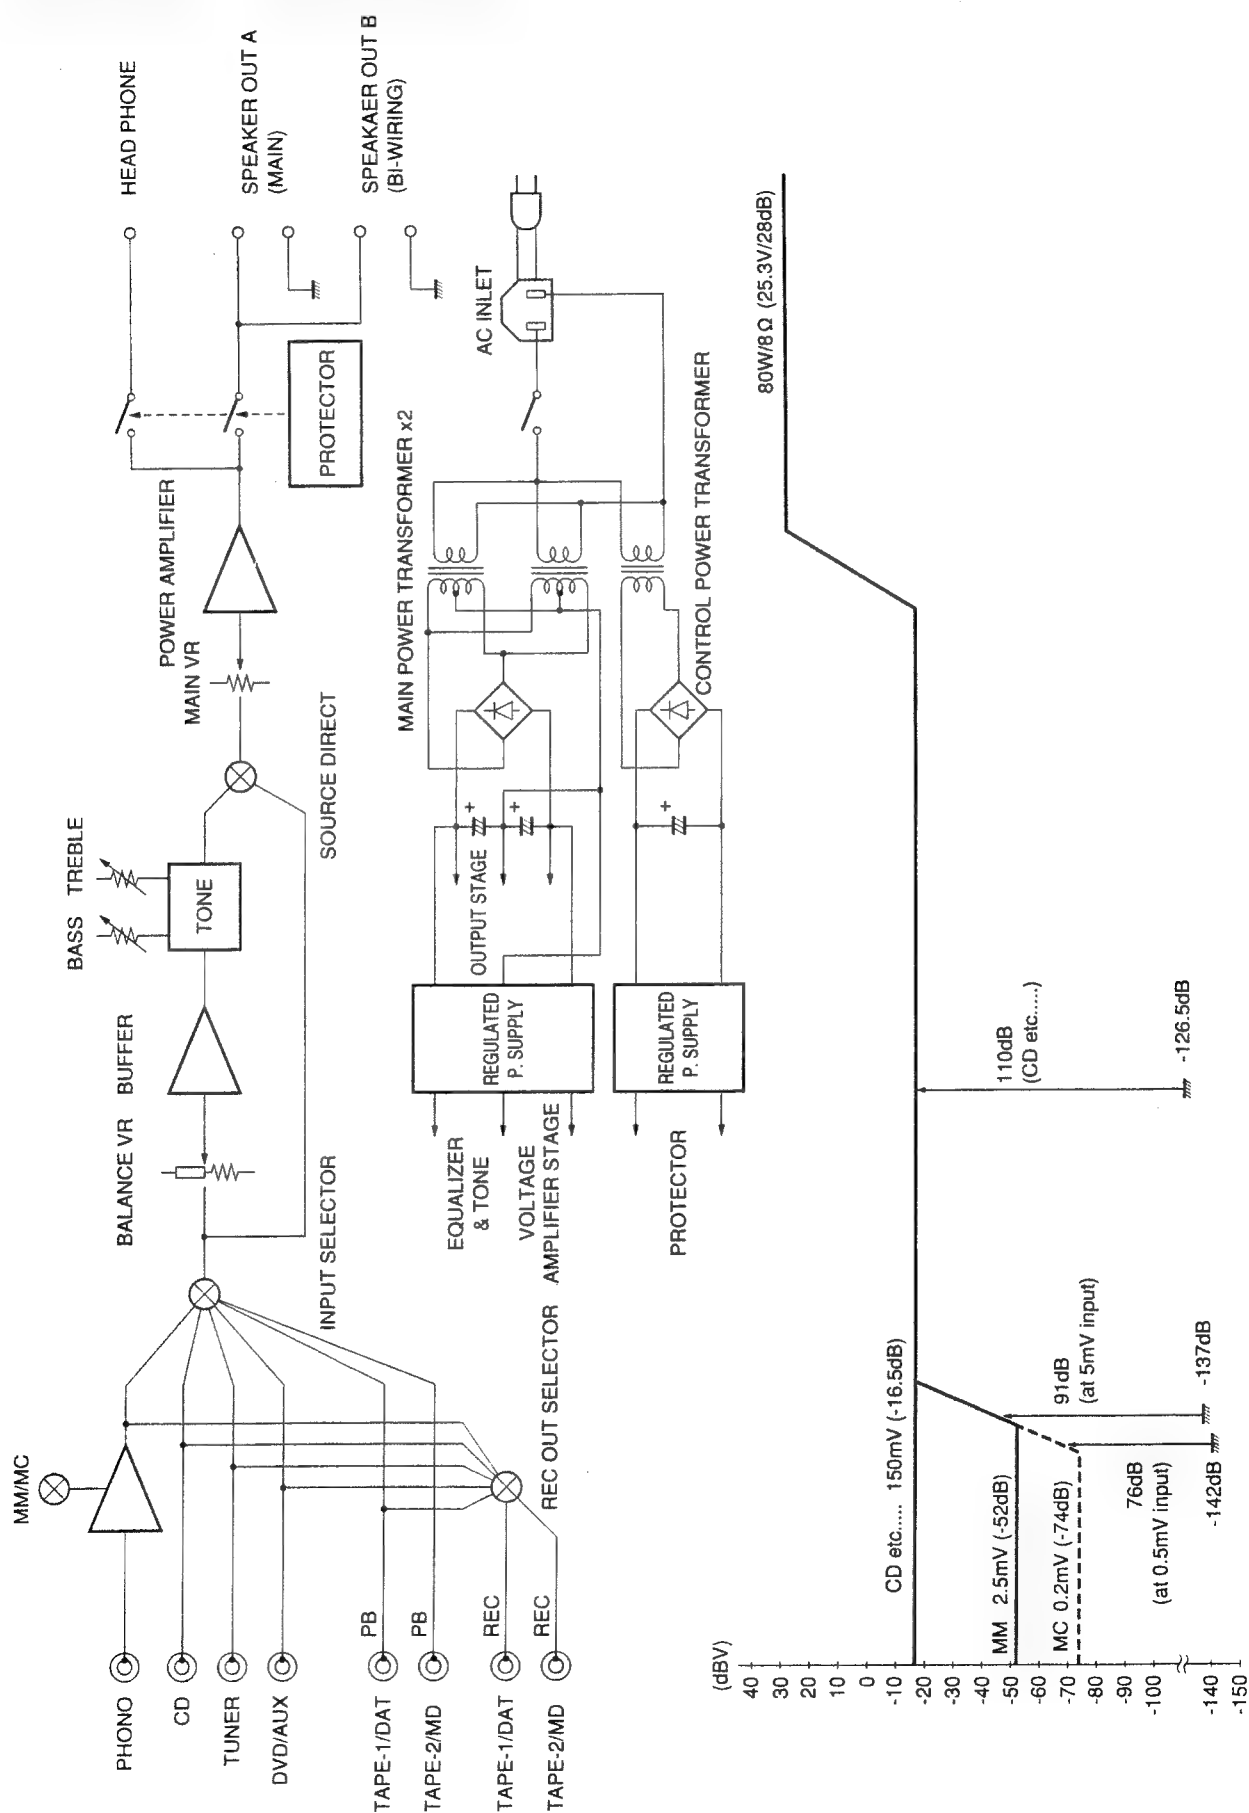


**SBX1610-52 (Remote Control Receiver)
(RH101)**



1. Vcc
2. Output
3. GND
4. Case Fin
5. Case Fin

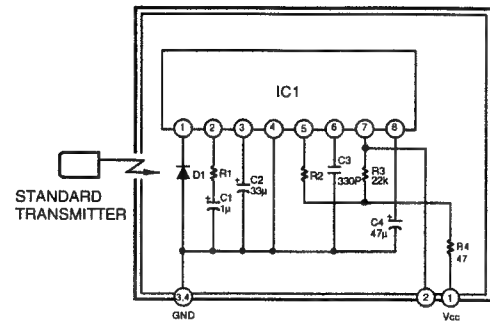

IC1 : CX20106A Chip
D1 : PIN Photodiode Chip
C1, C2, C4 : Aluminum Electrolytic Capacitor
C3 : SL Characteristic $\pm 5\%$
R1 : Gain control resistor
R2 : fo control resistor (Using $\pm 1\%$)
R (Other than above items) : $\pm 5\%$

**NJM2068DDC (IC201)
BA4558(IC701)**


- 1: A Output
2: A- Input
3: A+ Input
4: V-
5: B+ Input
6: B- Input
7: B Output
8: V+

NJM7806FA(S) (IC602)


- 1: Output
2: GND
3: Input

● TRANSISTORS
**2SA933(S)
2SC1740(S)**


- B (Base)
C (Collector)
E (Emitter)

**2SA988(E/F)
2SC1841(E/F)
2SD1111**



- B (Base)
C (Collector)
E (Emitter)

**2SB1328(P)
2SD2004(P)**



- B (Base)
C (Collector)
E (Emitter)

**DTA144ES
DTC123JS
DTC143ZS**



- B (Base)
C (Collector)
E (Emitter)

DTA144ES


	R1	R2
DTA144ES	47kohm	47kohm

**DTC123JS
DTC143ZS**



	R1	R2
DTC123JS	2.2kohm	47kohm
DTC143ZS	4.7kohm	47kohm

**2SB1186A(D)
2SD1763A(D)**



- E (Emitter)
C (Collector)
B (Base)

2SK184C(GR)/(BL)



- S (Source)
G (Gate)
D (Drain)

2SK369(BL)/(GR)-C


- S (Source)
G (Gate)
D (Drain)

2SK373(Y)


- D (Drain)
G (Gate)
S (Source)

2SC3421(O/Y)



- B (Base)
C (Collector)
E (Emitter)

2SK851


- S (Source)
D (Drain)
G (Gate)

● DIODES
1SS252



Dark blue

1SR35-200A



Blue

**HZS6B-1
HZS12A-1
MTZJ7.5A
MTZJ16A
MTZJ18A
MTZJ27A**




Dark blue

**RU-4Z (J8)
(D802~805)**


Brown

**SLR-56VC (LED)
(LD001,101~106)**


Short (Cathode)
Long (Anode)

**D5FB20 (4001)
(D801)**

**SFOR3G42 (Thyristor)
(SC601)**


- C (Cathode)
A (Anode)
G (Gate)

PRINTED WIRING BOARD

1 2 3 4 5 6 7 8

1U-2916C POWER AMP UNIT ASS'Y

A




1U-2916C POWER AMP UNIT ASS'Y	
-1	Power Amp (L) Unit
-2	Power Amp (R) Unit
-3	Control Unit
-4	P LED Unit
-5	Source Direct Switch Unit
-6	Power Switch Unit
-8	AC Outlet Unit
-9	Main VR Unit

B

C


D

E

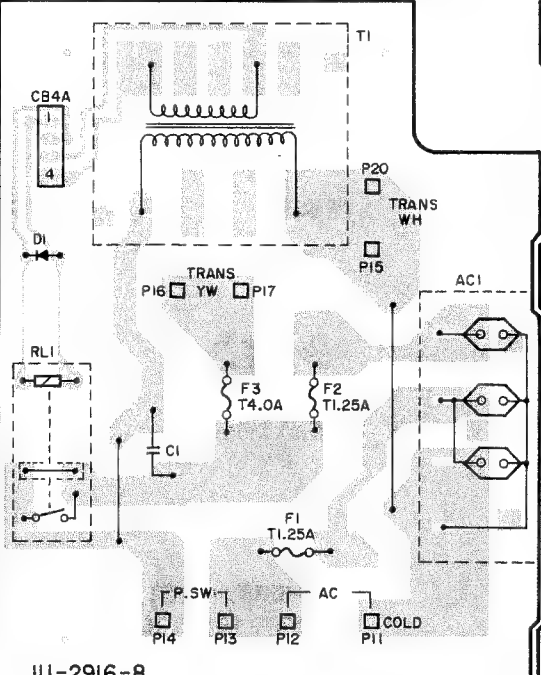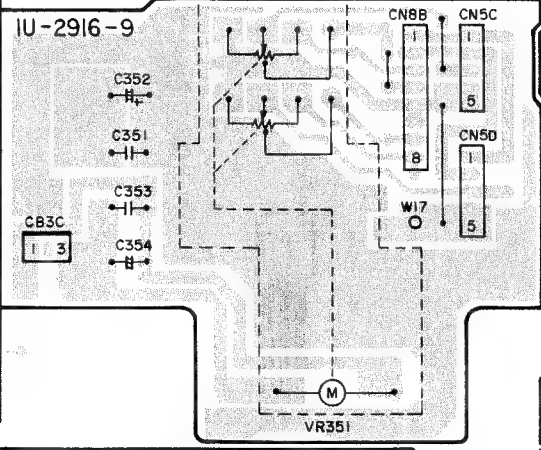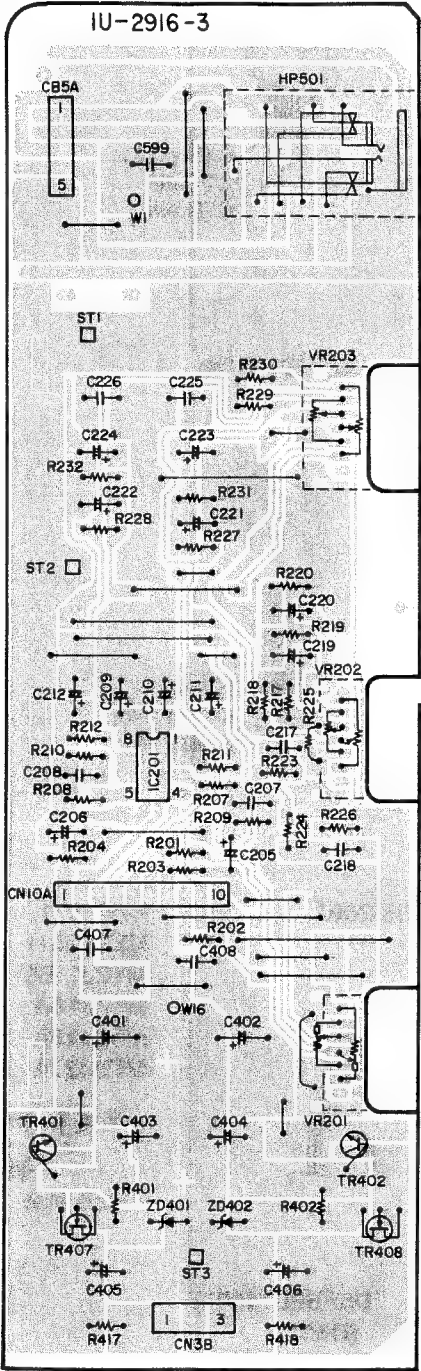

1U-2917C INPUT UNIT ASS'Y

1U-2917C INPUT UNIT ASS'Y	
-1	Input Unit
-2	Protector Unit
-3	Power Supply Unit
-5	Function SW Unit

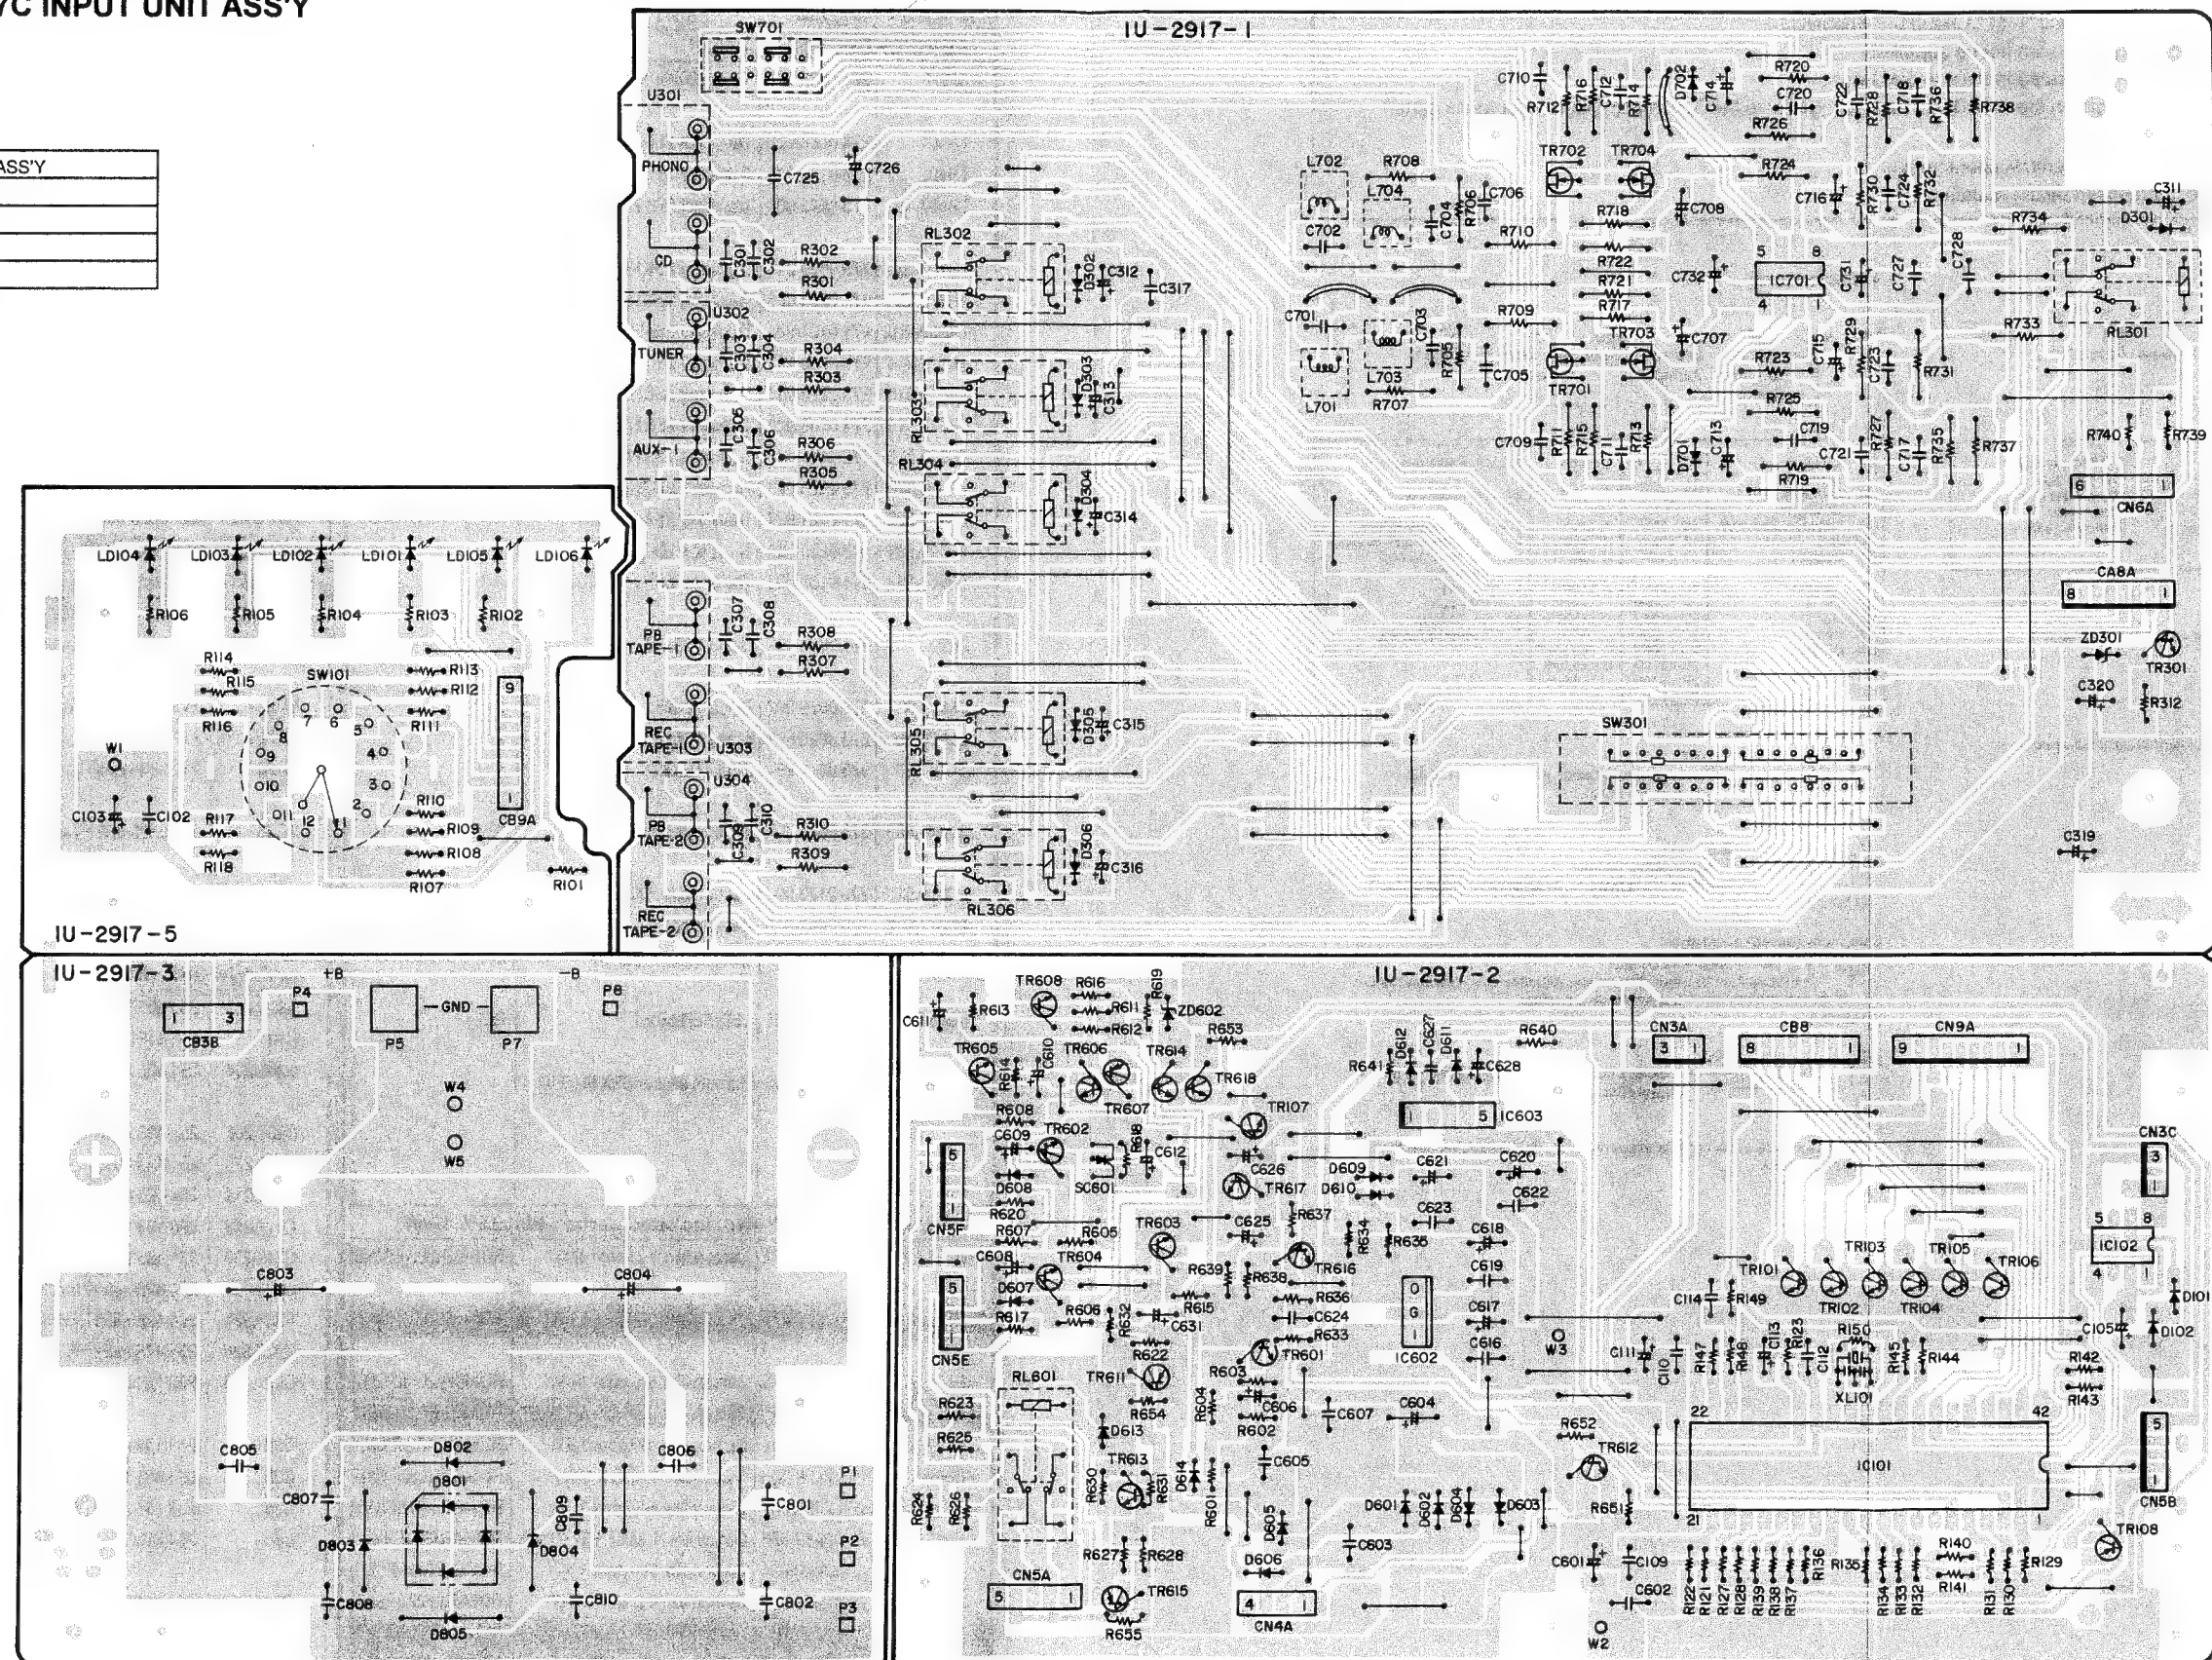

A

B

C

D

E

NOTE FOR PARTS LIST

- Part indicated with the mark "◎" are not always in stock and possibly to take a long period of time for supplying, or in some case supplying of part may be refused.
- When ordering of part, clearly indicate "1" and "1" (i) to avoid mis-supplying.
- Ordering part without stating its part number can not be supplied.
- Part indicated with the mark "★" is not illustrated in the exploded view.
- Not including Carbon Film $\pm 5\%$, 1/4W Type in the P.W.Board parts list. (Refer to the Schematic Diagram for those parts.)

WARNING:

Parts marked with this symbol Δ have critical characteristics.
Use ONLY replacement parts recommended by the manufacturer.

● Resistors

Ex.: RN 14K 2E 182 G ER
Type Shape Power Resist- Allowable Others
performance ance error

RD : Carbon	2B : 1/8W	F : $\pm 1\%$	P : Pulse-resistant type
RC : Composition	2E : 1/4W	G : $\pm 2\%$	NL : Low noise type
RS : Metal oxide film	2H : 1/2W	J : $\pm 5\%$	NB : Non-burning type
RW : Winding	3A : 1W	K : $\pm 10\%$	FR : Fuse-resistor
RN : Metal film	3D : 2W	M : $\pm 20\%$	F : Lead wire forming
RK : Metal mixture	3F : 3W		
	3H : 5W		

* Resistance

$\overline{1} \overline{8} \overline{2} \Rightarrow 1800 \text{ ohm} = 1.8 \text{ kohm}$
Indicates number of zeros after effective number.
2-digit effective number.

• Units: ohm

$\overline{1} \overline{R} \overline{2} \Rightarrow 1.2 \text{ ohm}$
1-digit effective number.
2-digit effective number, decimal point indicated by R.

• Units: ohm

● Capacitors

Ex.: CE 04W 1H 2R2 M BP
Type Shape Dielectric Capacity Allowable Others
performance strength error

CE : Aluminum foil electrolytic	0J : 6.3V	F : $\pm 1\%$	HS : High stability type
CA : Aluminum solid electrolytic	1A : 10V	G : $\pm 2\%$	BP : Non-polar type
CS : Tantalum electrolytic	1C : 16V	J : $\pm 5\%$	HR : Ripple-resistant type
CQ : Film	1E : 25V	K : $\pm 10\%$	DL : For charge and discharge
CK : Ceramic	1V : 35V	M : $\pm 20\%$	HF : For assuring high frequency
CC : Ceramic	1H : 50V	Z : $\pm 80\%$	U : UL part
CP : Oil	2A : 100V	-20%	C : CSA part
CM : Mica	2B : 125V	P : $\pm 100\%$	W : UL-CSA type
CF : Metallized	2C : 160V	-0%	F : Lead wire forming
CH : Metallized	2D : 200V	C : $\pm 0.25\text{pF}$	
	2E : 250V	D : $\pm 0.5\text{pF}$	
	2H : 500V	= : Others	
	2J : 630V		

* Capacity (electrolyte only)

$\overline{2} \overline{2} \overline{2} \Rightarrow 2200\mu\text{F}$
Indicates number of zeros after effective number.
2-digit effective number.

• Units: μF .

$\overline{2} \overline{R} \overline{2} \Rightarrow 2.2\mu\text{F}$
1-digit effective number.
2-digit effective number, decimal point indicated by R.

• Units: μF .

* Capacity (except electrolyte)

$\overline{2} \overline{2} \overline{2} \Rightarrow 2200\text{pF} = 0.0022\mu\text{F}$
(More than 2) — Indicates number of zeros after effective number.
2-digit effective number.

• Units: μF .

$\overline{2} \overline{2} \overline{1} \Rightarrow 220\text{pF}$
(0 or 1) — Indicates number of zeros after effective number.
2-digit effective number.

• Units: pF.

• When the dielectric strength is indicated in AC, "AC" is included after the dielectric strength value.

PARTS LIST OF PRINTED WIRING BOARD UNIT ASS'Y

1U-2916C POWER AMP P.W.B. UNIT ASS'Y

Ref. No.	Part No.	Part Name	Remarks
SEMICONDUCTORS GROUP			
IC201	263 0609 002	IC NJM2068DDC	
TR401	274 0158 003	Transistor 2SD1763A(D)	
TR402	272 0115 008	Transistor 2SB1186A(D)	
TR407,408	275 0042 905	Transistor 2SK373(Y)	
TR501~504	275 0055 015	Transistor 2SK184C (GR)/(BL)	
TR505~508	273 0235 923	Transistor 2SC1841(E/F)	
TR509~512	271 0131 924	Transistor 2SA988(E/F)	
TR513,514	273 0235 923	Transistor 2SC1841(E/F)	
TR515,516	273 0323 000	Transistor 2SC3421 (O/Y)	
TR517,518	274 0158 003	Transistor 2SD1763A(D)	
TR519,520	272 0115 008	Transistor 2SB1186A(D)	
TR525,526	273 0235 923	Transistor 2SC1841(E/F)	
TR527,528	271 0131 924	Transistor 2SA988(E/F)	
TR529,530	273 0235 923	Transistor 2SC1841(E/F)	
TR531,532	274 0158 003	Transistor 2SD1763A(D)	
D001	276 0616 907	Diode 1SS252	
D501,502	276 0616 907	Diode 1SS252	
D505~508	276 0616 907	Diode 1SS252	
D513~516	276 0616 907	Diode 1SS252	
ZD401,402	276 0645 907	Zener diode MTZJ18A	18V
ZD509,510	276 0473 904	Zener diode HZS12A-1	12V
ZD511,512	276 0462 902	Zener diode HZS6B-1	6V
ZD517,518	276 0645 949	Zener diode MTZJ27A	27V
LD001	393 9557 906	LED SLR-56VC	RED
RM101	499 0150 008	Remote sensor SBX1610-52	
RESISTORS GROUP (Not included carbon film $\pm 5\%$ 1/4W)			
R233,234	241 2423 972	Carbon film 3.6 kohm 1/4W	RD14B2E362J(PSNB)
Δ R417,418	241 2377 947	Carbon film 100 ohm 1/4W(NB)	RD14B2E101JNBS
R501,502	241 2420 975	Carbon film 200 ohm 1/4W	RD14B2E201J(PSNB)
Δ R503~506	241 2381 946	Carbon film 4.7 kohm 1/4W(NB)	RD14B2E472JNBS
R507,508	241 2420 904	Carbon film 100 ohm 1/4W	RD14B2E101J(PSNB)
R509,510	241 2429 963	Carbon film 1 Mohm 1/4W	RD14B2E105J(PSNB)
R511,512	241 2421 961	Carbon film 470 ohm 1/4W	RD14B2E471J(PSNB)
R513,514	241 2447 068	Carbon film 39 kohm 1/2W(RMG)	RD05A2H393J(RMG)
R515,516	241 2420 991	Carbon film 240 ohm 1/4W	RD14B2E241J(PSNB)
R517,518	241 2424 968	Carbon film 8.2 kohm 1/4W	RD14B2E822J(PSNB)
Δ R519~522	241 2315 963	Carbon film 330 ohm 1/4W(FR)	RD14B2E331GFRS
Δ R523~526	241 2376 922	Carbon film 33 ohm 1/4W(NB)	RD14B2E330JNBS

Ref. No.	Part No.	Part Name	Remarks
Δ R527,528	241 2380 918	Carbon film 1.3 kohm 1/4W(NB)	RD14B2E132JNBS
Δ R529,530	241 2377 921	Carbon film 82 ohm 1/4W(NB)	RD14B2E820JNBS
Δ R531,532	244 2068 048	Metal oxide 15 kohm 1W	RS14B3A15JNBS(RSF5V)
R533,534	241 2424 926	Carbon film 5.6 kohm 1/4W	RD14B2E562J(PSNB)
R535,536	241 2422 928	Carbon film 820 ohm 1/4W	RD14B2E821J(PSNB)
Δ R537~540	241 2371 930	Carbon film 160 ohm 1/4W(FR)	RD14B2E161GFRS
R541,542	241 2429 963	Carbon film 1 Mohm 1/4W	RD14B2E105J(PSNB)
R543,544	241 2423 969	Carbon film 3.3 kohm 1/4W	RD14B2E332J(PSNB)
Δ R545,546	244 2068 035	Metal oxide 390 ohm 1W	RS14B3A391JNBS(RSF5V)
Δ R547,548	244 2068 019	Metal oxide 200 ohm 1W	RS14B3A201JNBS(RSF5V)
Δ R549,550	244 2068 035	Metal oxide 390 ohm 1W	RS14B3A391JNBS(RSF5V)
Δ R553~556	241 2376 964	Carbon film 47 ohm 1/4W(NB)	RD14B2E470JNBS
Δ R557,558	243 2061 000	Wire wound 0.1 ohm 3W	RW009-3F0R1K
Δ R559,560	241 2380 963	Carbon film 2.2 kohm 1/4W(NB)	RD14B2E222JNBS
Δ R569,570	244 2029 003	Metal oxide 0.22 ohm 2W	RS14B3D022JNBS
R571,572	241 2429 963	Carbon film 1 Mohm 1/4W	RD14B2E105J(PSNB)
Δ R577,578	244 2061 932	Metal oxide 3.3 kohm 1W	RS14B3A332JNBS(S)
Δ R585,586	244 2067 007	Metal oxide 10 ohm 2W	RS14B3D100JNBS(RSKPL)
Δ R591,592	244 2051 990	Metal oxide 4.7 kohm 1W	RS14B3A472JNBS(S)
R596,599	241 2429 963	Carbon film 1 Mohm 1/4W	RD14B2E105J(PSNB)
VR201	211 0798 103	Variable resistor 100 kohm	BALANCE
VR202	211 0834 012	Variable resistor 10 kohm	TREBLE
VR203	211 0834 009	Variable resistor 30 kohm	BASS
VR351	211 0873 002	Variable resistor 30 kohm	VOLUME
VR501,502	211 8005 021	Semi fixed resistor 4.7 kohm	V06QB472
CAPACITORS GROUP			
C001,002	253 8003 713	Ceramic 4700pF/400V(AC)	CK45E2GAC472MC
C101	253 1181 904	Ceramic 0.01 μF /50V	CK45F1H103Z
C205,206	254 4260 977	Electrolytic 4.7 μF /50V	CE04W1H4R7M
C207,208	255 4235 918	Film 100pF/100V	CQ93P2A101J(NH)
C209,210	254 4260 948	Electrolytic 1 μF /50V	CE04W1H010M
C211,212	254 4254 941	Electrolytic 100 μF /16V	CE04W1C101M
C217,218	256 1034 911	Metallized 0.033 μF /50V	CF93A1H333J
C219,220	254 4260 919	Electrolytic 0.22 μF /50V	CE04W1HR22M
C221,222	254 4260 906	Electrolytic 0.1 μF /50V	CE04W1H0R1M
C223,224	254 4260 935	Electrolytic 0.47 μF /50V	CE04W1HR47M
C225,226	255 4232 924	Film 39pF/100V	CQ93P2A390J(NH)
C227,228	255 1264 966	Film 0.0033 μF /50V	CQ93M1H332J(B)
C351	253 1181 917	Ceramic 0.022 μF /50V	CK45F1H223Z
C352	254 4313 963	Electrolytic 1 μF /50V	CE04W1H010M(ASF)
C353	253 1181 917	Ceramic 0.022 μF /50V	CK45F1H223Z
C354	254 3055 918	Electrolytic 10 μF /35V	CE04D1V100MBP
C401,402	254 4356 742	Electrolytic 470 μF /50V	CE04W1H471(ARS)
C403,404	254 4356 713	Electrolytic 100 μF /50V	CE04W1H101MC(ARS)
C405,406	254 4415 010	Electrolytic 22 μF /100V	CE04W2A220M(ARS)

Ref. No.	Part No.	Part Name	Remarks
C545-548	254 4415 023	Electrolytic 47 μ F/100V	CE04W2A470M(ARS)
C551-554	255 4235 057	Film 0.1 μ F/100V	CQ93P2A104J(NH)
C555-558	254 4313 921	Electrolytic 22 μ F/50V	CE04W1H220M(ASF)
C561,562	254 4356 713	Electrolytic 100 μ F/50V	CE04W1H101MC(ARS)

OTHER PARTS GROUP

△ F001,002	206 1015 016	Fuse 1.25A	
△ F003	206 1015 087	Fuse 4A	
	202 0040 909	Fuse clip	F001-003
△ RL001	214 0142 004	Relay (TV-5)	
RL501,502	214 0129 001	Relay (DH2TU)	
△ SW001	212 1030 009	Power switch (TV-5)	
SW201	212 1157 005	1P push switch	
△ T001	233 6058 009	Power trans (mini-E2)	
L501,502	235 0053 019	Inductor 1 μ H	
HP501	204 8480 004	Head phone jack (SW)	
CN521-524	205 0915 062	6P BB connector	
CB3C	205 0343 032	3P connector base (KR-PH)	
CB5A	205 0233 058	5P EH connector base	
CB5B	205 0279 054	5P PH SID connector base	
CB5C	205 0233 058	5P EH connector base	
CB5D	203 8468 010	5P EH-SCN connector cord	
CB5E,5F	205 0343 058	5P connector base (KR-PH)	
CB6A	205 0233 061	6P EH connector base	
CB8B	204 2785 006	8P EH-SCN connector cord	
CB10A	204 2786 005	10P EH-SCN connector cord	
CN3B	205 0653 036	3P VH connector base	
CN4A	205 0233 045	4P EH connector base	
CN5C	203 8468 007	5P EH-SCN connector cord	
CN5D	205 0277 056	5P EH connector base (RD)	
CN8B	205 0233 087	8P EH connector base	
CN10A	205 0275 003	10P EH connector base	
TP501,502	205 0154 030	3P NH connector base	
P52	203 0629 019	1P contact Ass'y	
W16	203 0641 039	1P contact Ass'y	
P31,32	205 0864 003	M3 screw terminal	
P35,36	205 0864 003	M3 screw terminal	
	415 0299 000	Condenser cover	C001,002
	205 0452 017	Style pin	

Ref. No.	Part No.	Part Name	Remarks
	001 0166 099	Vinyl wire	
	415 0309 026	P.V.C. tube	PT501,502 (L=20)
	513 1873 062	Fuse label (1.25A)	F001,002
	513 1873 059	Fuse label (4A)	F003
PT501,502	279 0034 041	Posistor PTH9M04BD222TS2F333	

1U-2917C INPUT P.W.B. UNIT ASS'Y

Ref. No.	Part No.	Part Name	Remarks	Ref. No.	Part No.	Part Name	Remarks
SEMICONDUCTORS GROUP				RESISTORS GROUP (Not included carbon film $\pm 5\%$ 1/4W)			
IC101	262 1579 303	IC HD404304A13P	+6V	R301-310	241 2428 948	Carbon film 330 kohm 1/4W	RD14B2E334J(PSNB)
IC102	263 0476 002	IC LB1639		Δ R312	241 2378 920	Carbon film 220 ohm 1/4W(NB)	RD14B2E221JNBS
IC602	263 0793 002	IC NJM7806FA(S)		Δ R623-626	244 2052 960	Metal oxide 220 ohm 1W	RS14B3A221JNBS(S)
IC603	263 0535 008	IC M51954AL		Δ R634,635	241 2387 940	Carbon film 4.7 ohm 1/4W(NB)	RD14B2E4R7JNBS
IC701	263 0322 004	IC BA4558		Δ R654	244 2055 963	Metal oxide 82 ohm 1W	RS14B3A820JNBS(S)
TR101-106	269 0160 905	Transistor DTC143ZSA		R705,706	241 2420 904	Carbon film 100 ohm 1/4W	RD14B2E101J(PSNB)
TR107	269 0051 904	Transistor DTC123JS(2.2K-47K)		R707,708	241 2426 940	Carbon film 47 kohm 1/4W	D14B2E473J(PSNB)
TR108	269 0093 904	Transistor DTA144ES(47K-47K)		R709,710	241 2417 962	Carbon film 10 ohm 1/4W	D14B2E100J(PSNB)
TR301	274 0151 903	Transistor 2SD2004(P)		R711-714	241 2423 956	Carbon film 3 kohm 1/4W	D14B2E302J(PSNB)
TR601-606	27 30303 910	Transistor 2SC1740S(S)		R715,716	241 2420 975	Carbon film 200 ohm 1/4W	RD14B2E201J(PSNB)
TR607	271 0192 905	Transistor 2SA933S(S)		R717,718	241 2423 914	Carbon film 2 kohm 1/4W	RD14B2E202J(PSNB)
TR608	273 0303 910	Transistor 2SC1740S(S)		R719,720	241 2419 986	Carbon film 82 ohm 1/4W	RD14B2E820J(PSNB)
TR611	272 0107 906	Transistor 2SB1328(P)		R721,722	241 2422 928	Carbon film 820 ohm 1/4W	RD14B2E821J(PSNB)
TR612-614	273 0303 910	Transistor 2SC1740S(S)		R725,726	241 2426 940	Carbon film 47 kohm 1/4W	RD14B2E473J(PSNB)
TR615	271 0192 905	Transistor 2SA933S(S)		R727,728	241 2423 985	Carbon film 3.9 kohm 1/4W	RD14B2E392J(PSNB)
TR616,617	273 0303 910	Transistor 2SC1740S(S)		R729,730	241 2418 945	Carbon film 22 ohm 1/4W	RD14B2E220J(PSNB)
TR618	274 0111 901	Transistor 2SD1111		R731,732	241 2420 988	Carbon film 220 ohm 1/4W	RD14B2E221J(PSNB)
TR701-704	275 0038 045	Transistor 2SK369 (BL)/(GR)-C		R733,734	241 2421 961	Carbon film 470 ohm 1/4W	RD14B2E471J(PSNB)
D101,102	276 0616 907	Diode 1SS252		R735,736	241 2429 918	Carbon film 620 kohm 1/4W	RD14B2E624J(PSNB)
D301-306	276 0616 907	Diode 1SS252		R737,738	241 2417 920	Carbon film 6.8 ohm 1/4W	RD14B2E6R8J(PSNB)
D601-606	276 0553 905	Diode 1SR35-200A		Δ R739,740	241 2313 985	Carbon film 4.7 ohm 1/4W(FR)	RD14B2E4R7JFRS
D609	276 0616 907	Diode 1SS252		R987-989	241 2429 918	Carbon film 620 kohm 1/4W	RD14B2E624J(PSNB)
D610-612	276 0616 907	Diode 1SS252		CAPACITORS GROUP			
D613	276 0616 907	Diode 1SS252		C105	254 4252 930	Electrolytic 100 μ F/10V	CE04W1A101M
D614	276 0616 907	Diode 1SS252		C109	253 1180 921	Ceramic 1000pF/50V	CK45B1H102K
D701,702	276 0616 907	Diode 1SS252	16V	C110	253 1181 917	Ceramic 0.022 μ F/50V	CK45F1H223Z
D801	276 0356 005	Diode D5FB20 (4001)		C111	254 4252 930	Electrolytic 100 μ F/10V	CE04W1A101M
D802-805	276 0574 706	Diode RU4Z(J8)		C112	253 1181 917	Ceramic 0.022 μ F/50V	CK45F1H223Z
ZD301	276 0644 995	Zener diode MTZJ16A		C113	254 4252 930	Electrolytic 100 μ F/10V	CE04W1A101M
ZD602	276 0644 911	Zener diode MTZJ7.5A		C114	253 1179 987	Ceramic 470pF/50V	CK45B1H471K
LD101-106	393 9557 906	LED SLR-56VC	7.5V	C311,312	254 4313 947	Electrolytic 4.7 μ F/50V	CE04W1H4R7M(ASF)
SC601	279 0038 908	SCR SF0R3G42	Red	C313-316	254 4260 977	Electrolytic 4.7 μ F/50V	CE04W1H4R7M
				C317	255 4235 934	Film 0.01 μ F/100V	CQ93P2A103J(NH)
				C318	254 4260 977	Electrolytic 4.7 μ F/50V	CE04W1H4R7M
				C319	254 4356 713	Electrolytic 100 μ F/50V	CE04W1H101MC(ARS)
				C320	254 4356 726	Electrolytic 22 μ F/50V	CE04W1H220MC(ARS)
				C603	255 4235 057	Film 0.1 μ F/100V	CQ93P2A104J(NH)
				C604	254 4256 790	Electrolytic 2200 μ F/16V	CE04W1E222MC
				C605	255 4235 057	Film 0.1 μ F/100V	CQ93P2A104J(NH)
				C606	254 4252 930	Electrolytic 100 μ F/10V	CE04W1A101M
				C607	255 4235 976	Film 0.015 μ F/100V	CQ93P2A153J(NH)
				C608,609	254 4260 948	Electrolytic 1 μ F/50V	CE04W1H010M
				C610	254 4250 945	Electrolytic 330 μ F/6.3V	CE04W0J331M

Ref. No.	Part No.	Part Name	Remarks	Ref. No.	Part No.	Part Name	Remarks
C611	254 4252 943	Electrolytic 220μF/10V	CE04W1A221M	CN6A	205 0233 061	6P EH connector base	
C612	254 4252 927	Electrolytic 47μF/10V	CE04W1A470M	CN8A	205 0343 087	8P connector base (KR-PH)	
C616	253 1181 917	Ceramic 0.022μF/50V	CK45F1H223Z	CN9A	205 0343 090	9P connector base (KR-PH)	
C617	254 4260 980	Electrolytic 10μF/50V	CE04W1H100M				
C618	254 4252 930	Electrolytic 100μF/10V	CE04W1A101M	CB8A	205 0343 087	8P connector base (KR-PH)	
C619	253 1181 917	Ceramic 0.022μF/50V	CK45F1H223Z	CB9A	205 0279 096	9P SID connector base	
C620	254 4250 945	Electrolytic 330μF/6.3V	CE04W0J331M				
C621	254 4254 789	Electrolytic 1000μF/16V	CE04W1C102MC	P005	205 0864 003	M3 screw terminal	
C622-624	253 1181 917	Ceramic 0.022μF/50V	CK45F1H223Z	P007	205 0864 003	M3 screw terminal	
C625	254 4260 935	Electrolytic 0.47μF/50V	CE04W1HR47M		001 0185 025	Vinyl wire	
C626	254 4260 948	Electrolytic 1μF/50V	CE04W1H010M				
C627	256 1034 982	Metallized 0.12μF/50V	CF93A1H124J				
C628	254 4260 922	Electrolytic 0.33μF/50V	CE04W1HR33M				
C703,704	255 4237 961	Film 150pF/100V	CQ93P2A151J(NH)				
C705,706	255 4232 937	Film 1000pF/100V	CQ93P2A102J(NH)				
C707,708	254 4313 950	Electrolytic 100μF/50V	CE04W1H101M(ASF)				
C711,712	255 4232 995	Film 3300pF/100V	CQ93P2A332J(NH)				
C713,714	254 4313 950	Electrolytic 100μF/50V	E04W1H101M(ASF)				
C715,716	254 4313 918	Electrolytic 10μF/50V	E04W1H100M(ASF)				
C717,718	255 4237 945	Film 1200pF/100V	CQ93P2A122J(NH)				
C719,720	255 4236 713	Film 0.068μF/100V	CQ93P2A683J(NH)				
C721,722	255 4237 958	Film 0.018μF/100V	CQ93P2A183J(NH)				
C723,724	255 4232 937	Film 1000pF/100V	CQ93P2A102J(NH)				
C727,728	255 4235 743	Film 0.022μF/100V	CQ93P2A223J(NH)				
C731,732	254 4368 934	Electrolytic 100μF/25V	E04W1E101M(ASF)				
C801,802	256 1042 903	Metallized 0.1μF/250V	CF93A2E104K				
C805,806	255 4235 057	Film 0.1μF/100V	CQ93P2A104J(NH)				
OTHER PARTS GROUP							
XL101	399 0191 903	Resonator CST4.00MGW	4MHz				
RL301-306	214 0127 003	Relay (RY-12W)					
RL601	214 0127 003	Relay (RY-12W)					
SW101	2120332 009	Rotary switch					
SW301	212 4331 006	Slide switch (4-6) remote					
SW701	212 4728 004	1P push switch					
U301-304	204 8530 006	4P pin jack					
	203 0629 019	1P contact Ass'y					
CN3B	205 0653 036	3P VH connector base					
CN3C	205 0343 032	3P connector base (KR-PH)					
CN4A	205 0233 045	4P EH connector base					
CN5A	205 0233 058	5P EH connector base					
CN5B	205 0343 058	5P connector base (KR-PH)					
CN5E,5F	205 0343 058	5P connector base (KR-PH)					



PARTS LIST OF EXPLODED VIEW






Ref. No.	Part No.	Part Name	Remarks	Q'ty	Ref. No.	Part No.	Part Name	Remarks	Q'ty
1	1U-2916 C	Power amp unit Ass'y		1s	45	417 0534 114	Power radiator (R)		1
1-1	1U-2916 C-1	Power amp unit (L)		(1)	46	275 0095 004	Transistor 2SK851	TR521-524	4
1-2	1U-2916 C-2	Power amp unit (R)		(1)	47	415 0234 007	Insulating sheet	TR521-524	4
1-3	1U-2916 C-3	Control unit		(1)	48	412 4127 001	PWB bracket (B)		2
1-4	1U-2916 C-4	P LED unit		(1)	49	412 4116 203	Radiator bracket (R)		1
1-5	1U-2916 C-5	S direct switch unit		(1)	50	412 4114 001	Radiator bracket (B)		1
1-6	1U-2916 C-6	P switch unit		(1)	51	417 0534 101	Power radiator (L)		1
1-8	1U-2916 C-8	AC outlet unit		(1)	52	412 4115 204	Radiator bracket (L)		1
1-9	1U-2916 C-9	Main VR unit		(1)	53	412 4113 002	Radiator bracket (A)		1
2	1U-2917 C	Input unit Ass'y		1s	54	445 8004 007	Wire clasper		34
2-1	1U-2917 C-1	Input unit		(1)	55	113 1356 062	Push knob (MARU)	SOURCE DIRECT	1
2-2	1U-2917 C-2	Protector unit		(1)	56	144 2510 225	Front panel Ass'y		1
2-3	1U-2917 C-3	Power supply unit		(1)	57	212 4799 004	Rotary remote switch	REC OUT SELECTOR	1
2-5	1U-2917 C-5	F sw unit		(1)	58	441 1780 119	Plate (M)	VOLUME	1
3	203 3975 003	AC outlet (E2)		1	59	441 1781 008	Plate (F)	INPUT SELECTOR	1
4,5	206 1015 016	Fuse (1.25A)	F001,002	2	60	113 9213 039	Power knob Ass'y		1
6	204 8480 004	Head phone jack (SW)	HP501	1	61	112 0780 005	Knob (M) Ass'y	VOLUME	1
7	214 0129 001	Relay (DH2TU)	RL501,502	2	62	112 9125 108	Knob (F) Ass'y	INPUT SELECTOR	1
8	212 1030 009	Power switch (TV-5)	SW001	1	63	112 0787 008	Knob (MARU) Ass'y	BASS, TREBLE, BALANCE, REC OUT SELECTOR	4
9	212 1157 005	1P push switch	SW201 (SOURCE DIRECT)	1	65	102 0574 104	Top cover		1
10	233 8058 009	Power trans (mini-E2)	T001	1	66	461 9036 005	Spacer (15x15xT5)	Top cover	2
11	211 0798 103	Variable resistor 100 kohm	VR201 (BALANCE)	1	68	209 0012 006	Short pin		2
12	211 0834 012	Variable resistor 10 kohm	VR202 (TREBLE)	1	70	206 1015 087	Fuse (4A)	F003	1
13	211 0834 009	Variable resistor 30 kohm	VR203 (BASS)	1	71	513 1581 008	Serial No. sheet		1
14	211 0873 002	Variable resistor 30 kohm	VR351 (VOLUME)	1	72	461 0867 008	Arm cushion		2
16	214 0127 003	Relay (RY-12W)	RL301-306,601	7	73	414 0793 008	Cover (AC)		1
17	212 4331 006	Slide switch (4-6) remote	SW301	1	75	417 0540 001	CU plate		2
18	212 4728 004	1P push switch	SW701(MM/MC)	1	76	477 0096 007	Push rivet		8
19	212 0332 009	Rotary switch	SW101 (INPUT SELECTOR)	1	77	461 0550 085	Rubber pad		1
20	204 8530 006	4P pin jack	U301-304	4	78	415 0680 017	Spacer		1
22	411 1341 007	Front chassis		1	WIRES				
23	445 0048 016	Cord holder	L=50	2	203 4871 083	3P KR-KR ribbon cable	CN3C to CB3C		1
24	411 1346 109	Trans chassis		1	203 5161 006	3P VH-VH connector cord	CN3B to CB3B		1
26	105 1196 124	Back panel		1	203 6473 010	4P EH-EH connector cord			1
27	205 1014 205	4P terminal Ass'y	SPEAKER	2	203 8465 000	5P EH-EH connector cord	CN5A to CB5B		1
28	412 4141 003	Trans bracket		1	203 8342 055	5P KR-KR ribbon cable			1
30	513 1606 006	Power trans label (A)		2	203 8342 039	5P KR-KR ribbon cable			1
32	205 0071 016	GND terminal Ass'y		1	203 8342 039	5P KR-KR ribbon cable			1
33	477 0018 001	Washer (P-87)		1	204 0519 009	6P EH-EH connector cord	CN6A to CB6A		1
34	414 0765 007	Shield plate		1	204 2547 095	8P KR-KR ribbon cable	CN8A to CB8A		1
35	443 9015 002	P.W. spacer (H=8)		2	204 2550 040	9P KR-KR ribbon cable	CN9A to CB9A		1
36	415 9016 019	P.W. holder (H=8)		2	001 0202 005	Vinyl wire			1
37	412 4112 100	PWB bracket (A)		1	001 0202 018	Vinyl wire			1
38	203 3970 008	AC inlet		1	001 0202 021	Vinyl wire			1
39	105 1197 204	Bottom cover		1	001 0202 034	Vinyl wire			1
41	104 0173 213	Foot Ass'y		4					
42	233 8211 008	Power trans (E2)		2					
43	415 9032 006	P.C.B. holder (T)		4					
44	254 6204 009	Electrolytic 12000μF/71V		1					

Ref. No.	Part No.	Part Name	Remarks	Q'ty
	001 0166 086	Vinyl wire	Black	2
	001 0197 055	Vinyl wire	Red	1
	001 0197 068	Vinyl wire	Blue	1
	001 0203 004	Vinyl wire (3C)	3C twist wire	2
	415 0695 015	UL tube	SP terminal wire	2
	415 0767 001	UL tube (16) BK		1
	415 0767 024	UL tube (16) BK		1
	203 0530 014	1P contact Ass'y		1
SCREWS				
101	473 7002 021	Screw 3x8 (S)-B	CBTS(S)-B	86
102	477 0263 005	3P swelling screw		4
103	473 7508 017	Screw 3x10 (P)-B	CBTS(P)-B	8
104	477 0263 018	3P swelling screw		10
105	477 0064 107	Fixing screw		4
106	473 7501 014	Screw 3x14 (P)-Z	CBTS(P)-Z	6
107	473 7500 015	Screw 3x8 (P)-Z	CBTS(P)-Z	11
108	473 7007 000	Screw 4x8 (S)-B	CBTS(S)-B	14
109	473 8007 038	Cup screw 3x14		14
110	473 7003 004	Screw 3x8 (S)-Z	CFTS(S)-Z	2
111	470 0009 022	Screw 3x6 (SW.S)	CPS(SW.S)-Z	6
112	473 7500 028	Screw 3x8 (P)-Z	CFTS (P)-Z	2
113	475 1003 006	3W		2
114	473 7003 017	Screw 3x8 (S)-B	CFTS (S)-B	2
PACKING & ACCESSORIES				
151	504 9102 029	Stylen paper	700x900	1
152	505 9102 019	Poly cover	900x455	1
153	505 8006 019	Envelope		1
154	503 1221 002	Cushion Ass'y		1
155	501 1554 058	Carton case		1
157	511 2946 002	Inst. manual		1
158	515 0671 300	S.S. list (EX)		1
160	206 2147 006	AC cord with connector		1
161	513 1389 006	Control card base		1
162	513 1349 004	Thermal carbon film		1
163	499 0277 004	Remote controller	RC-176	1




SCHEMATIC DIAGRAM

6

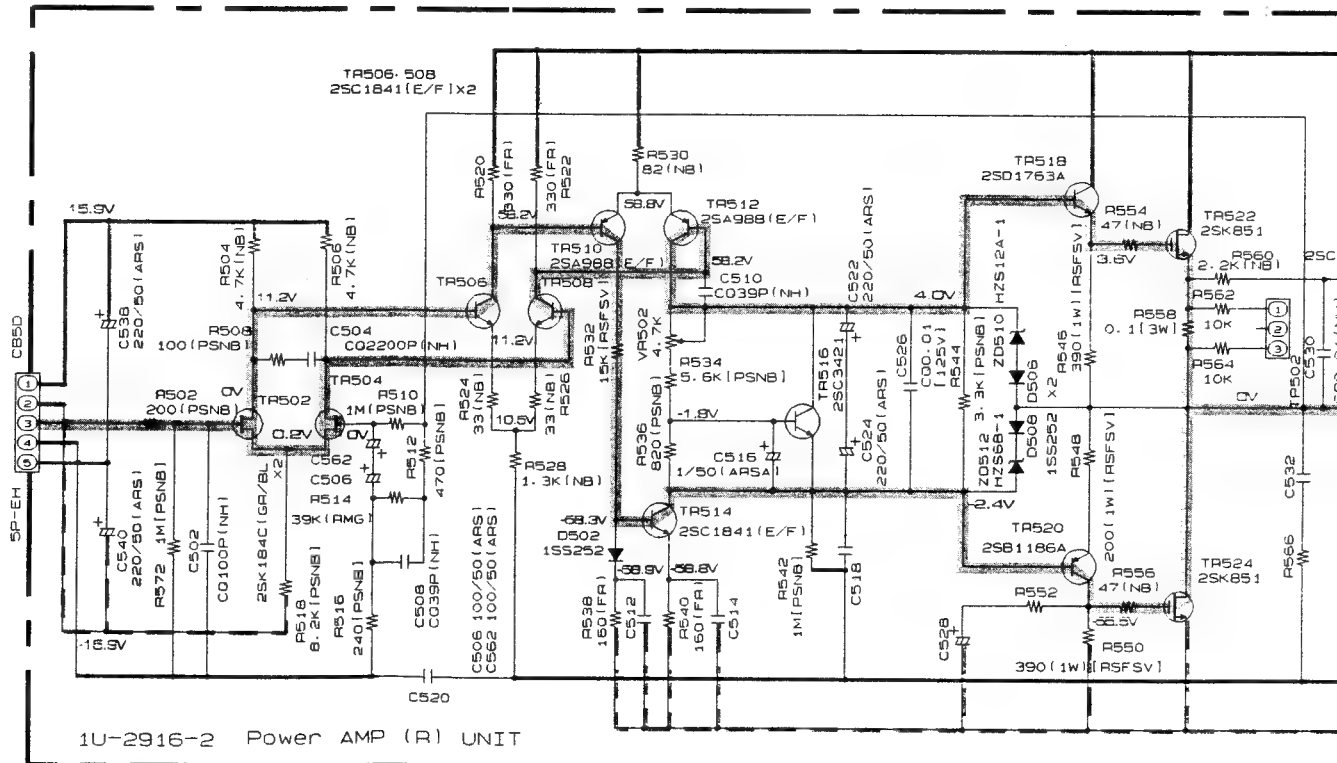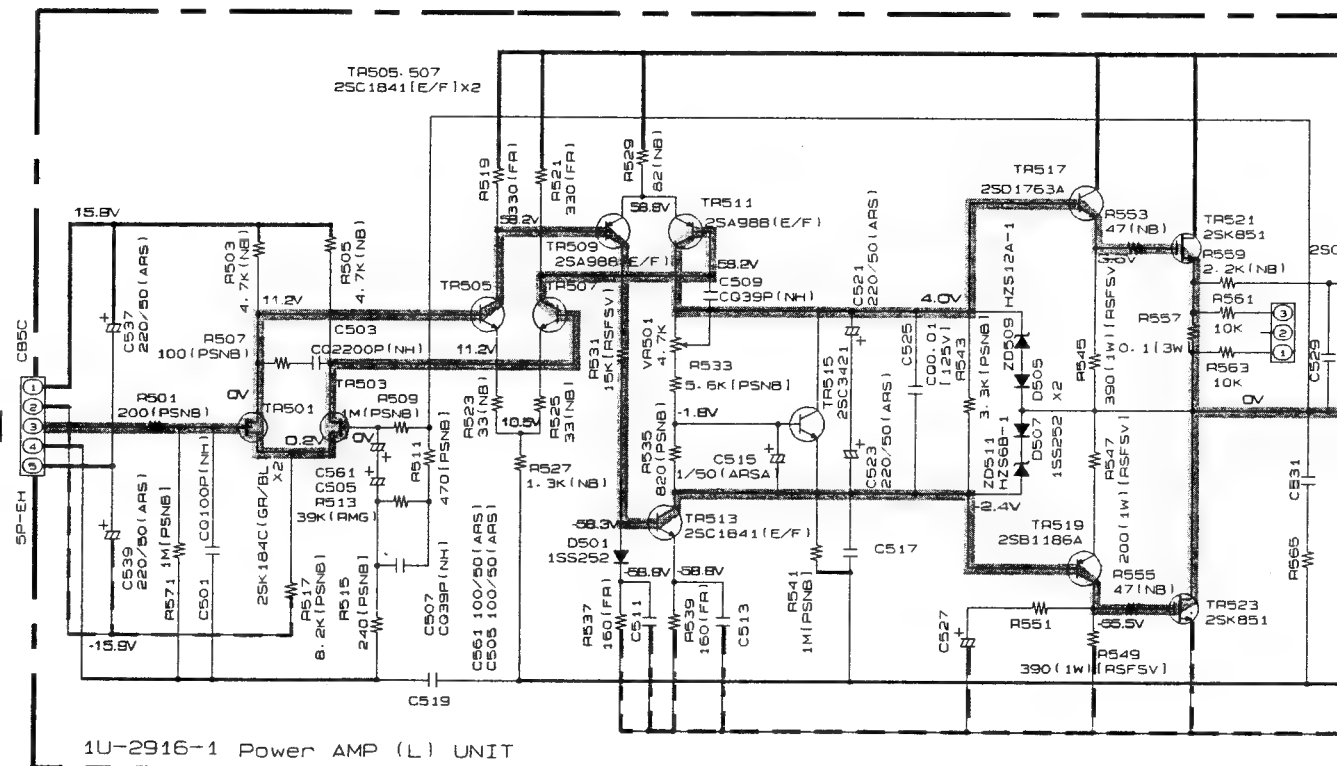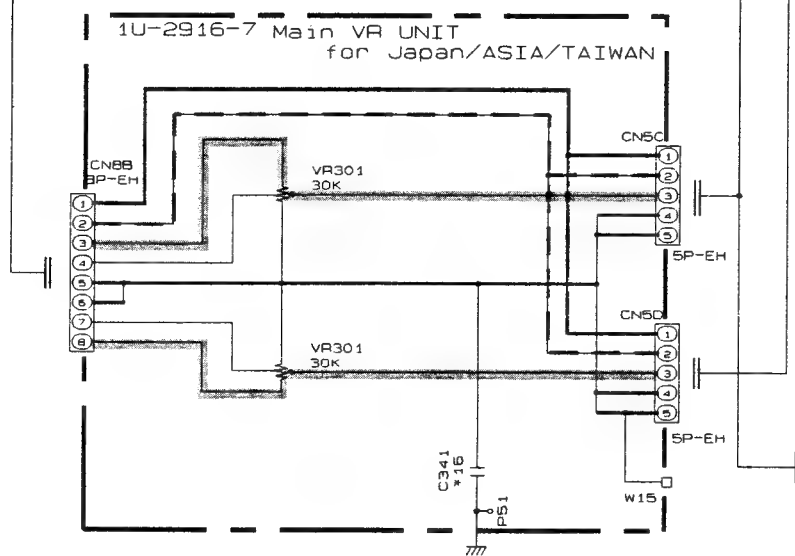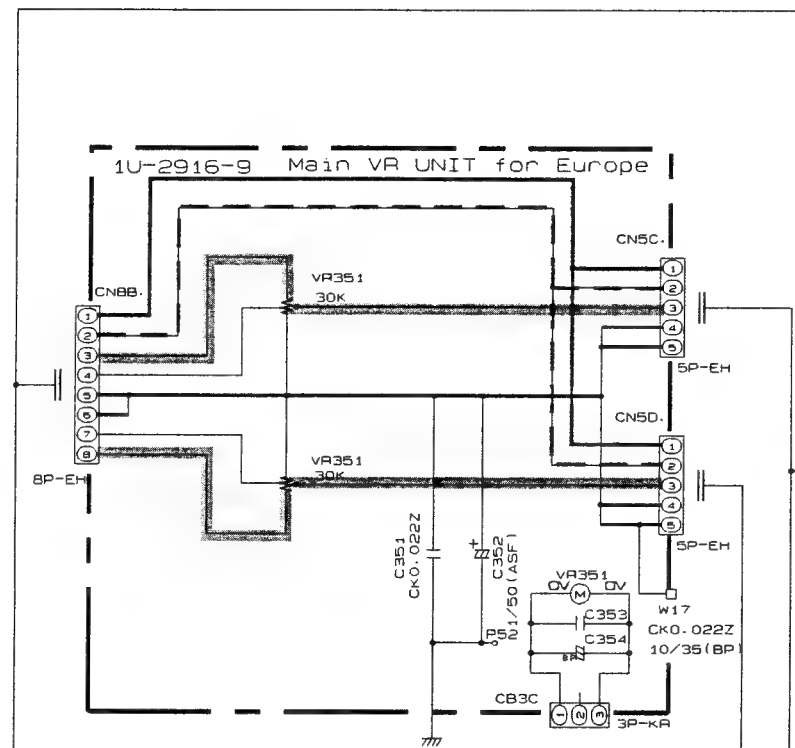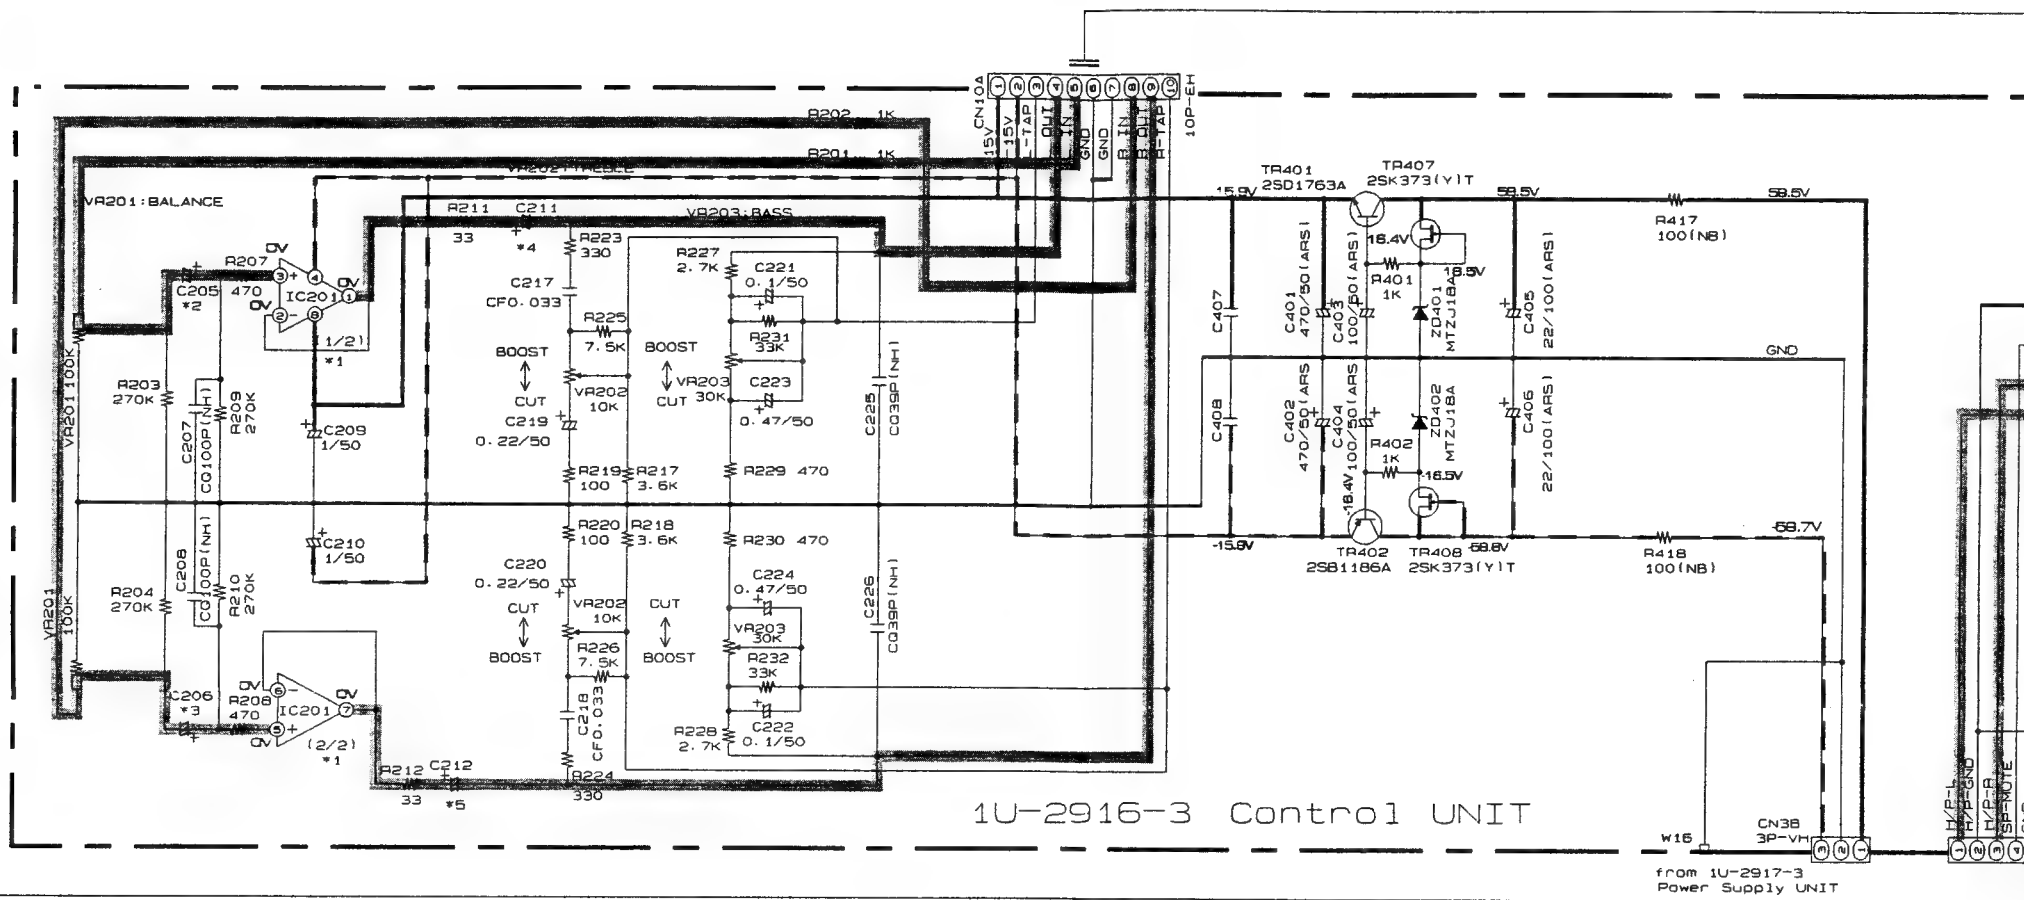

PARTS-NO.	*1 IC201	*2-3 C205-206	*4-5 C211-212	*6-7 C227-228	*8-9 C235-236	*10-11 R569-570	*12-15 C551-554	*16 C341	*17 AM101	*18 C101	*19 F
JAPAN	BA455B	1/50	10/16	-	-	100nm[2w]	C00-01[125v]	CF1uF[50v]	-	-	-
ASIA	BA455B	1/50	10/16	-	-	100nm[2w]	C00-1[100v]	CF1uF[63v]	-	-	1.
TAIWAN	BA455B	1/50	10/16	-	-	100nm[2w]	C00-1[100v]	CF1uF[63v]	-	-	1.
EUROPE	NJM2068DOC	4-7/50	100/16	C03300PF	4700nm	0.220m[2w]	C00-1[100v]	-	S8x1610-52	C00-012	1.

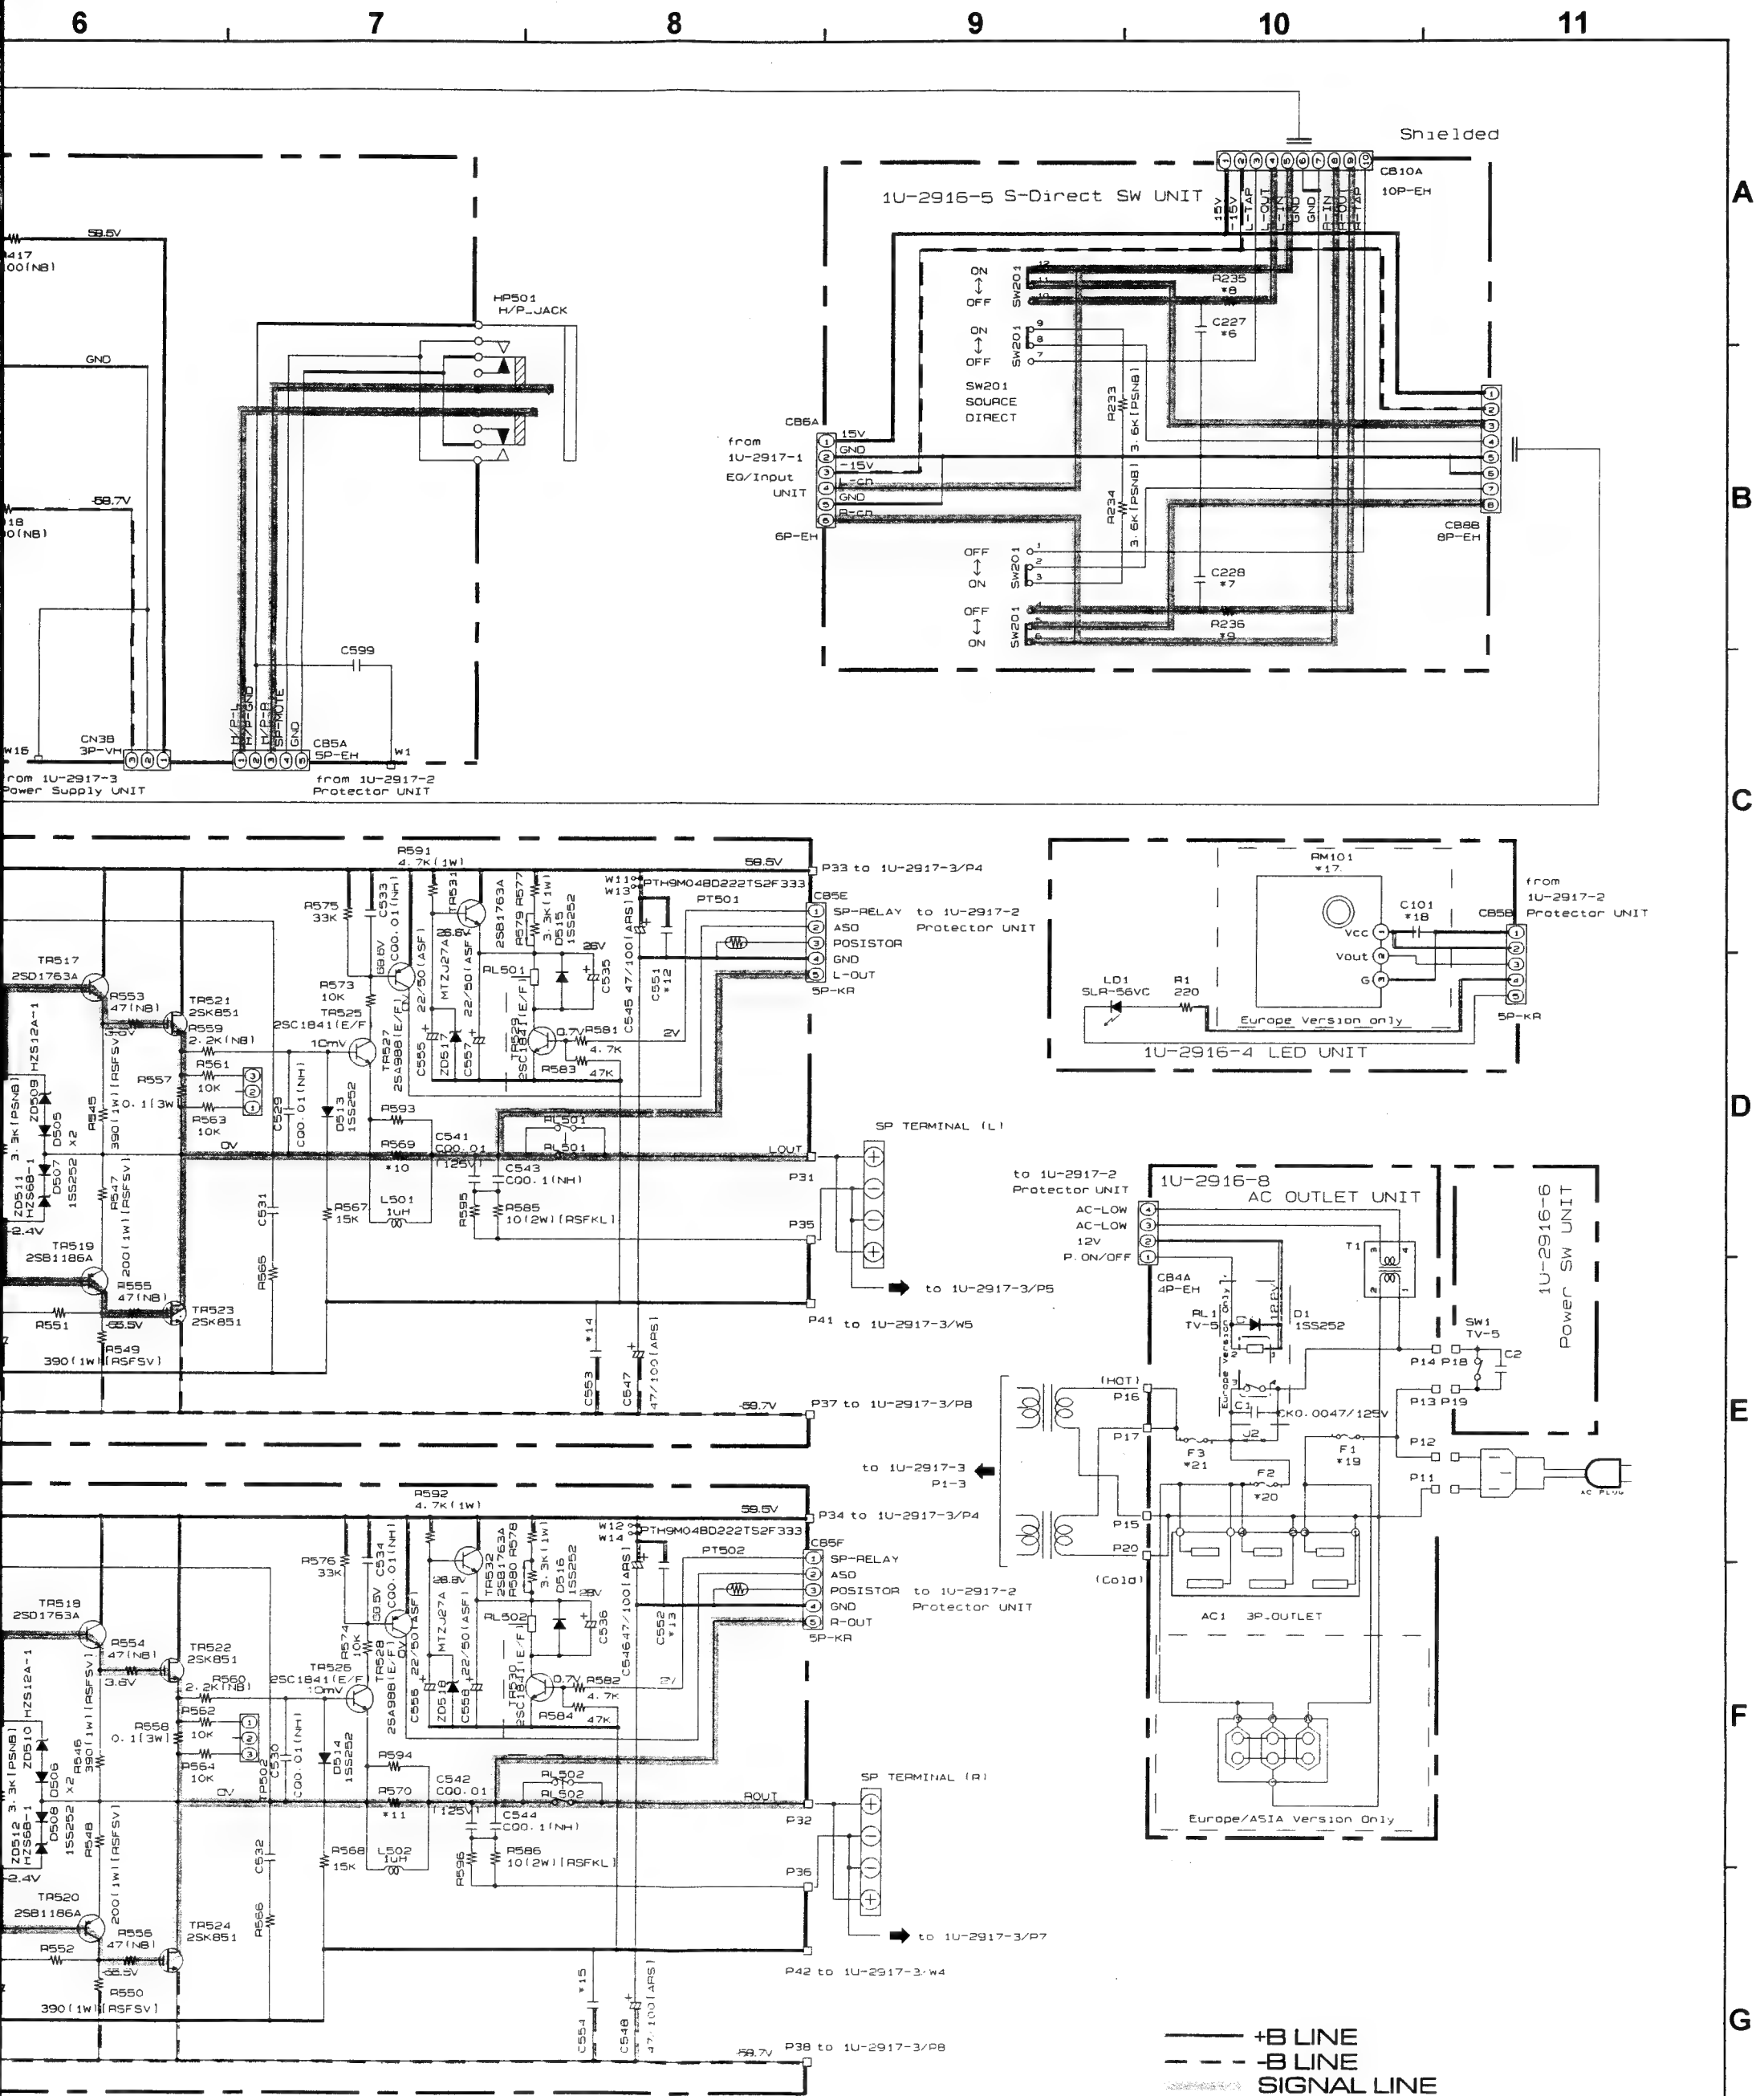


NOTES
 ALL RESISTANCE VALUES IN OHM. k=1,000 OHM, M=1,000,000 OHM
 ALL CAPACITANCE VALUES IN MICRO FARAD. P=MICRO-MICRO FARAD
 EACH VOLTAGE AND CURRENT ARE MEASURED AT NO SIGNAL INPUT CONDITION.
 CIRCUIT AND PARTS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

WARNING:
 Parts marked with this symbol  have critical characteristics.
 Use ONLY replacement parts recommended by the manufacturer.

CAUTION:
 Before returning the unit to the customer, make sure you make either (1) a leakage current check or (2) a line to chassis resistance check. If the leakage current exceeds 0.5 millamps, or if the resistance from chassis to either side of the power cord is less than 240 kohms, the unit is defective.


WARNING:
 DO NOT return the unit to the customer until the problem is located and corrected.

SCHEMATIC DIAGRAM

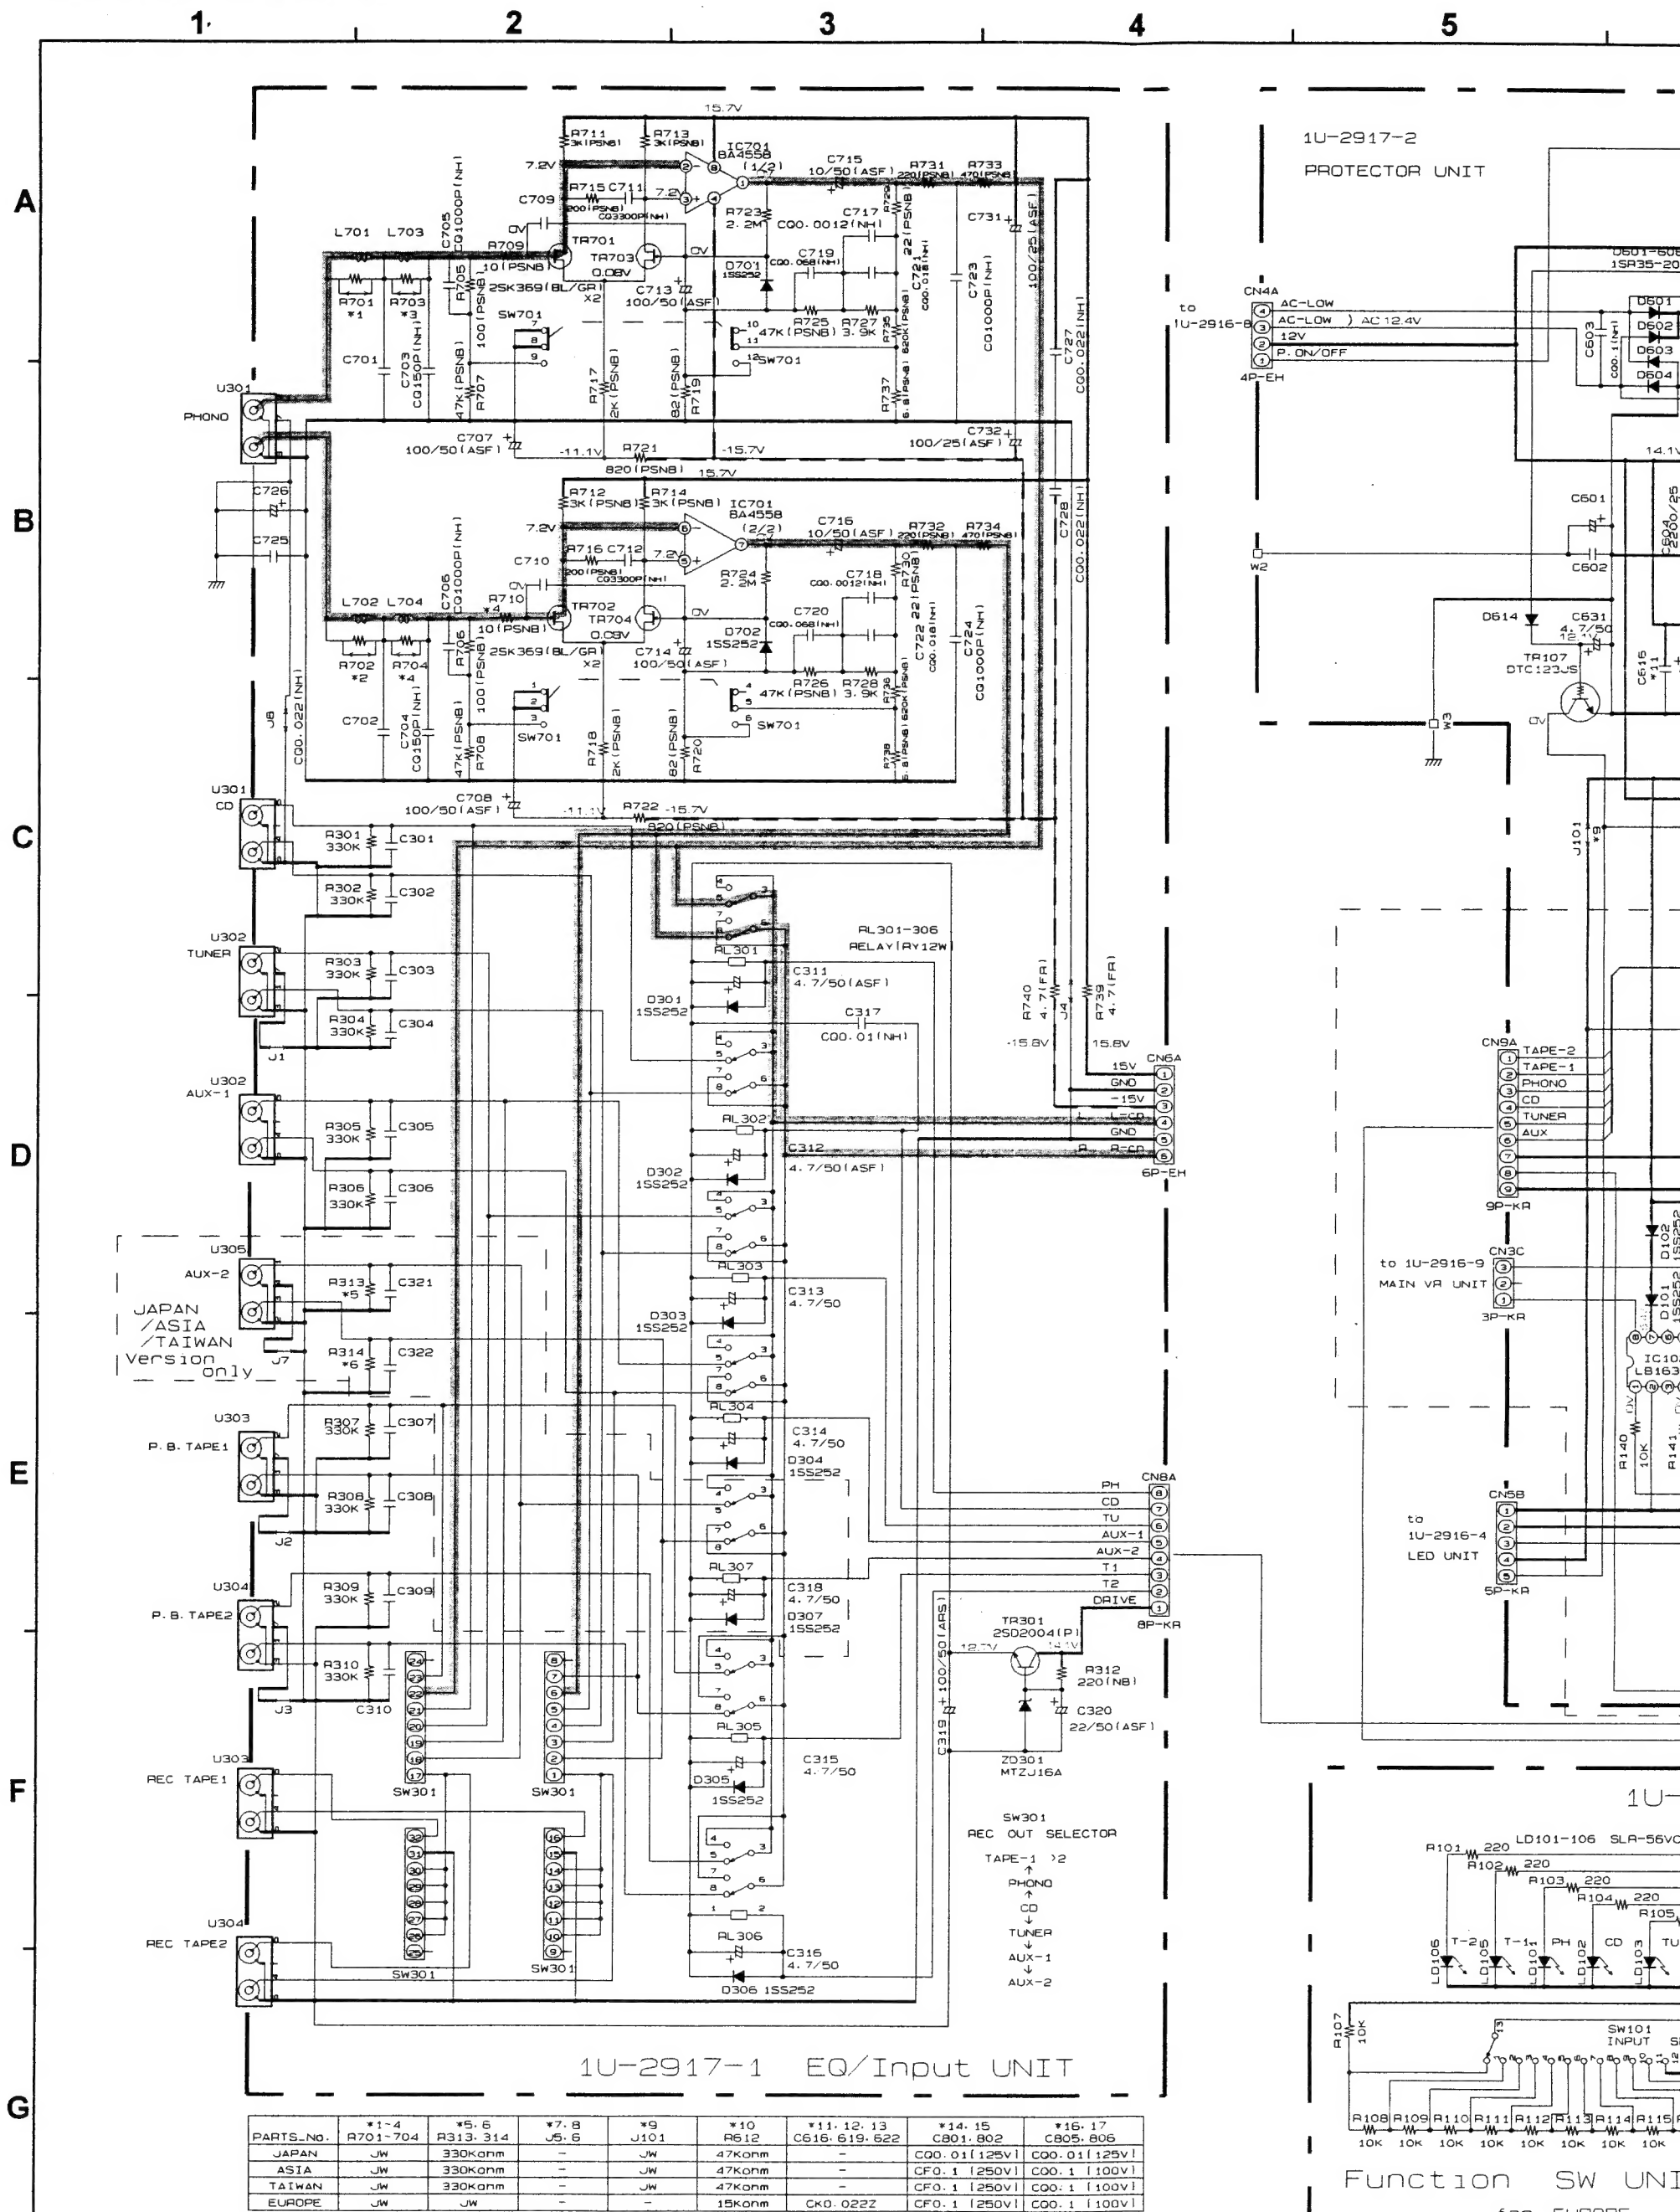

SCHEMATIC DIAGRAM

1
2
3
4
5
A
B
C
D
E
F
G
H

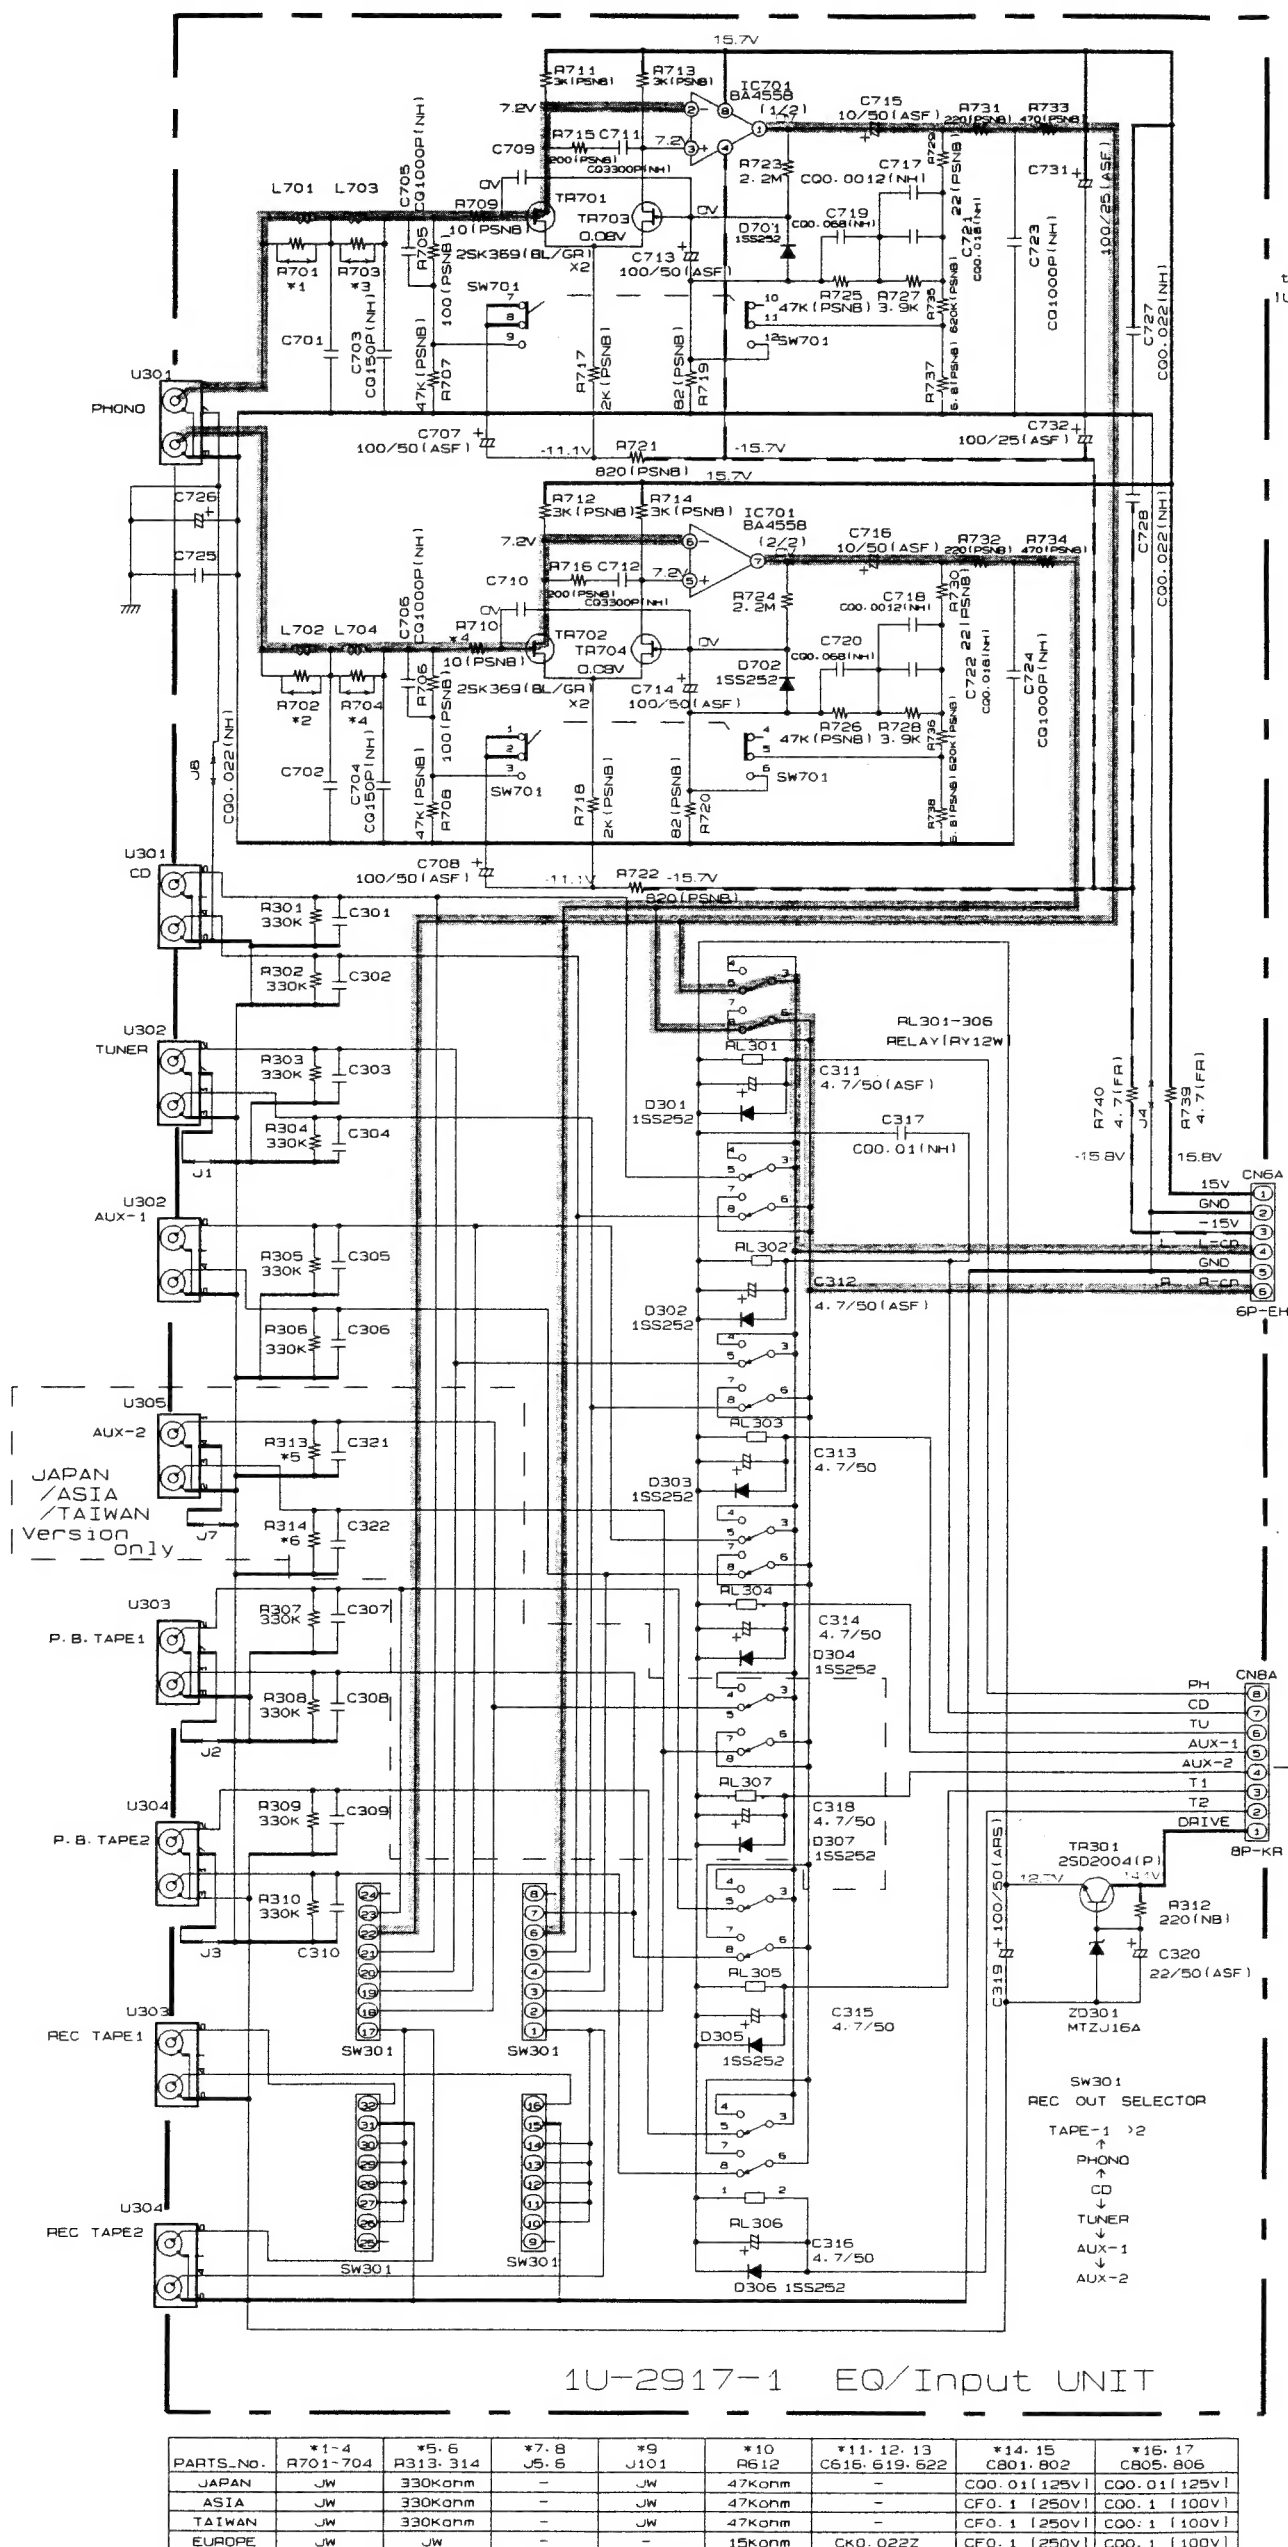

NOTES

ALL RESISTANCE VALUES IN OHM. K=1,000 OHM, M=1,000,000 OHM
ALL CAPACITANCE VALUES IN MICRO FARAD. P=PICTO-MICRO FARAD
EACH VOLTAGE AND CURRENT ARE MEASURED AT NO SIGNAL INPUT
CONDITION.

CIRCUIT AND PARTS ARE SUBJECT TO CHANGE WITHOUT PRIOR
NOTICE.

WARNING:

Parts marked with this symbol have critical characteristics.
Use ONLY replacement parts recommended by the manufacturer.


CAUTION:

Before returning the unit to the customer, make sure you make either (1) a
leakage current check or (2) a line to chassis resistance check. If the leakage
current exceeds 0.5 milliamperes, or if the resistance from chassis to either side
of the power cord is less than 240 kohms, the unit is defective.


WARNING:

DO NOT return the unit to the customer until the problem is located and
corrected.

1U-2917-2
PROTECTOR UNIT

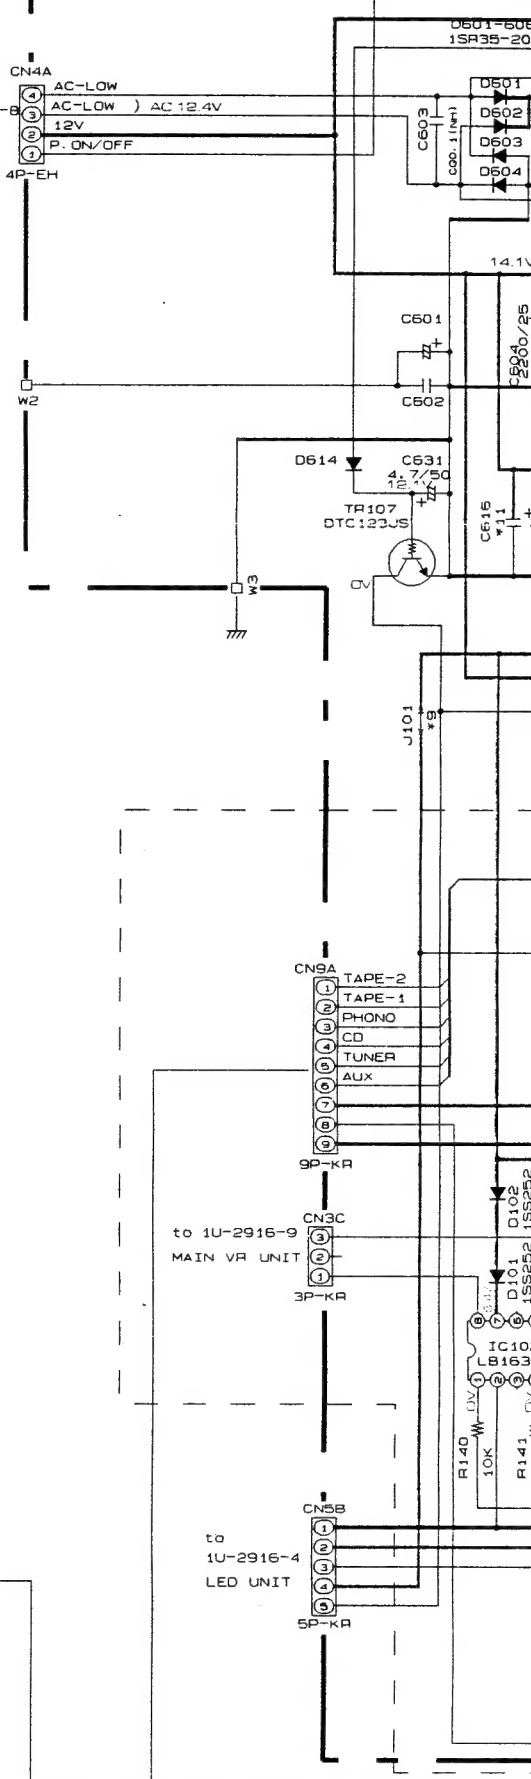

1U-2916-4
LED UNIT

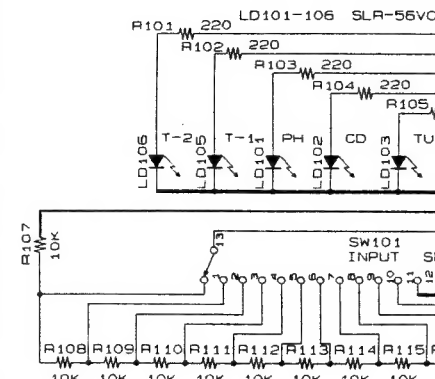

Function SW UNIT
for EUROPE

